SOLID TO SUCCEED


XCMG

铲业登顶

SHOVEL YOUR WAY TO THE TOP

XCMG EARTHMOVING MACHINERY BUSINESS DIVISION

VER：202503V1

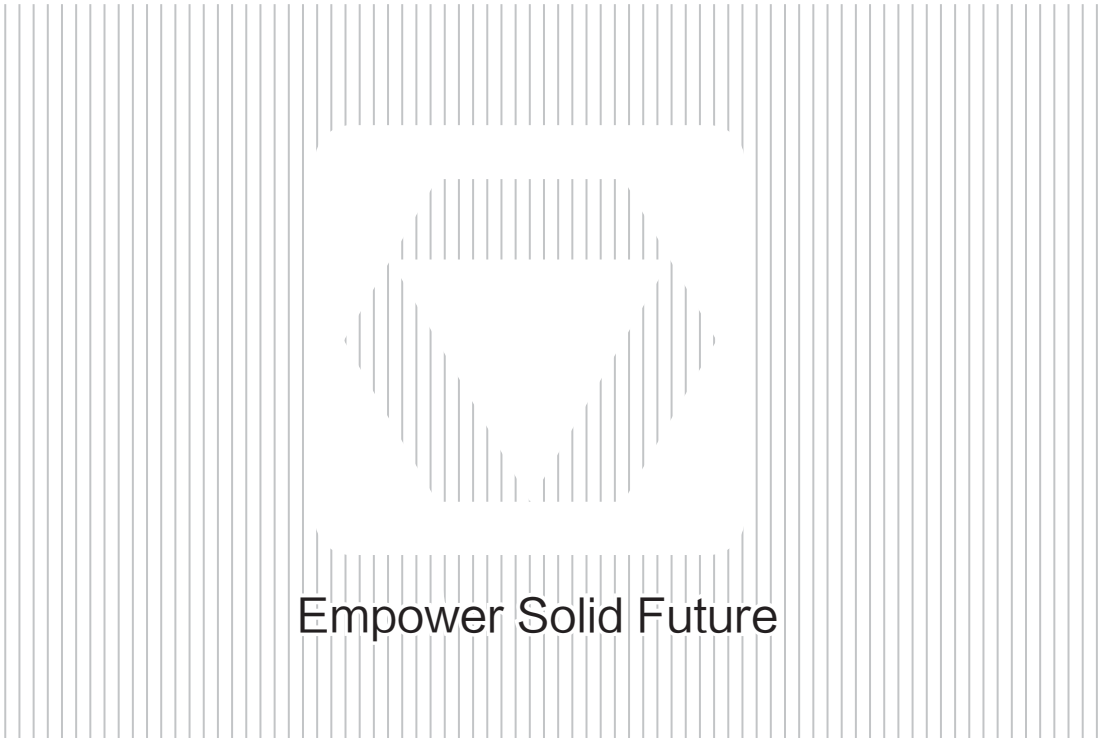
Empower Solid Future

CONTENTS

TABLE OF CONTENTS

About XCMG 01/08

Brief Introduction to XCMG Earthmoving Machinery Division 07/28

Product Profile 29/30

Wheel Loader

Compact Wheel Loader 35/46
Medium Wheel Loader 47/52
Large Wheel Loader 53/57
Ultra-Tonnage Wheel Loader 58/62

New Energy Products

Pure Electric Products 67/79
Hybrid Wheel Loader 80/82
Cable-Towed Wheel Loader 83
Battery Swapping Wheel Loader 84
Hydrogen Wheel Loader 85/86

Skid Steer Loader

Skid Steer Loader 91/97
Compact Track Loader 98/102

Backhoe Loader 103/114

Specialized Products 117/136

Attachments 137/138

01 ABOUT XCMG

XCMG INTRODUCTION

The predecessor of XCMG can be traced back to Huaxing Iron Works, which was established in 1943. As a pioneer, founder, and leader in China's construction machinery industry, XCMG has grown into a globally competitive and influential enterprise with a market value of hundreds of billions. It is recognized as a world-leading brand in the industry.

XCMG


A witness to the revitalization of China's construction machinery industry and a leader in China's construction machinery sector.
In China, XCMG has always been at the forefront of industrial transformation.
In the worldwide, XCMG has gained its popularity in more than 190 countries and regions.

XCMG

The Company's main indicators have consistently ranked first in the domestic industry, and for many consecutive years, it has remained in the first tier of the global industry, listed among the "World's Top 500 Brands," ranked among the top 500 Chinese enterprises by Fortune, and the top 30 outbound enterprises by Forbes, all ranking first in the domestic industry; it ranks first globally in lifting machinery and first in China for 16 types of construction machinery hosts and new energy heavy-duty trucks.

The Company has formed a modern industrial system of "5+1+1" comprising construction machinery, commercial vehicles, and modern service industries. Its products are exported to more than 190 countries and regions, with a coverage rate of over 95% along the "Belt and Road," making it a business card for China's equipment manufacturing industry going global.



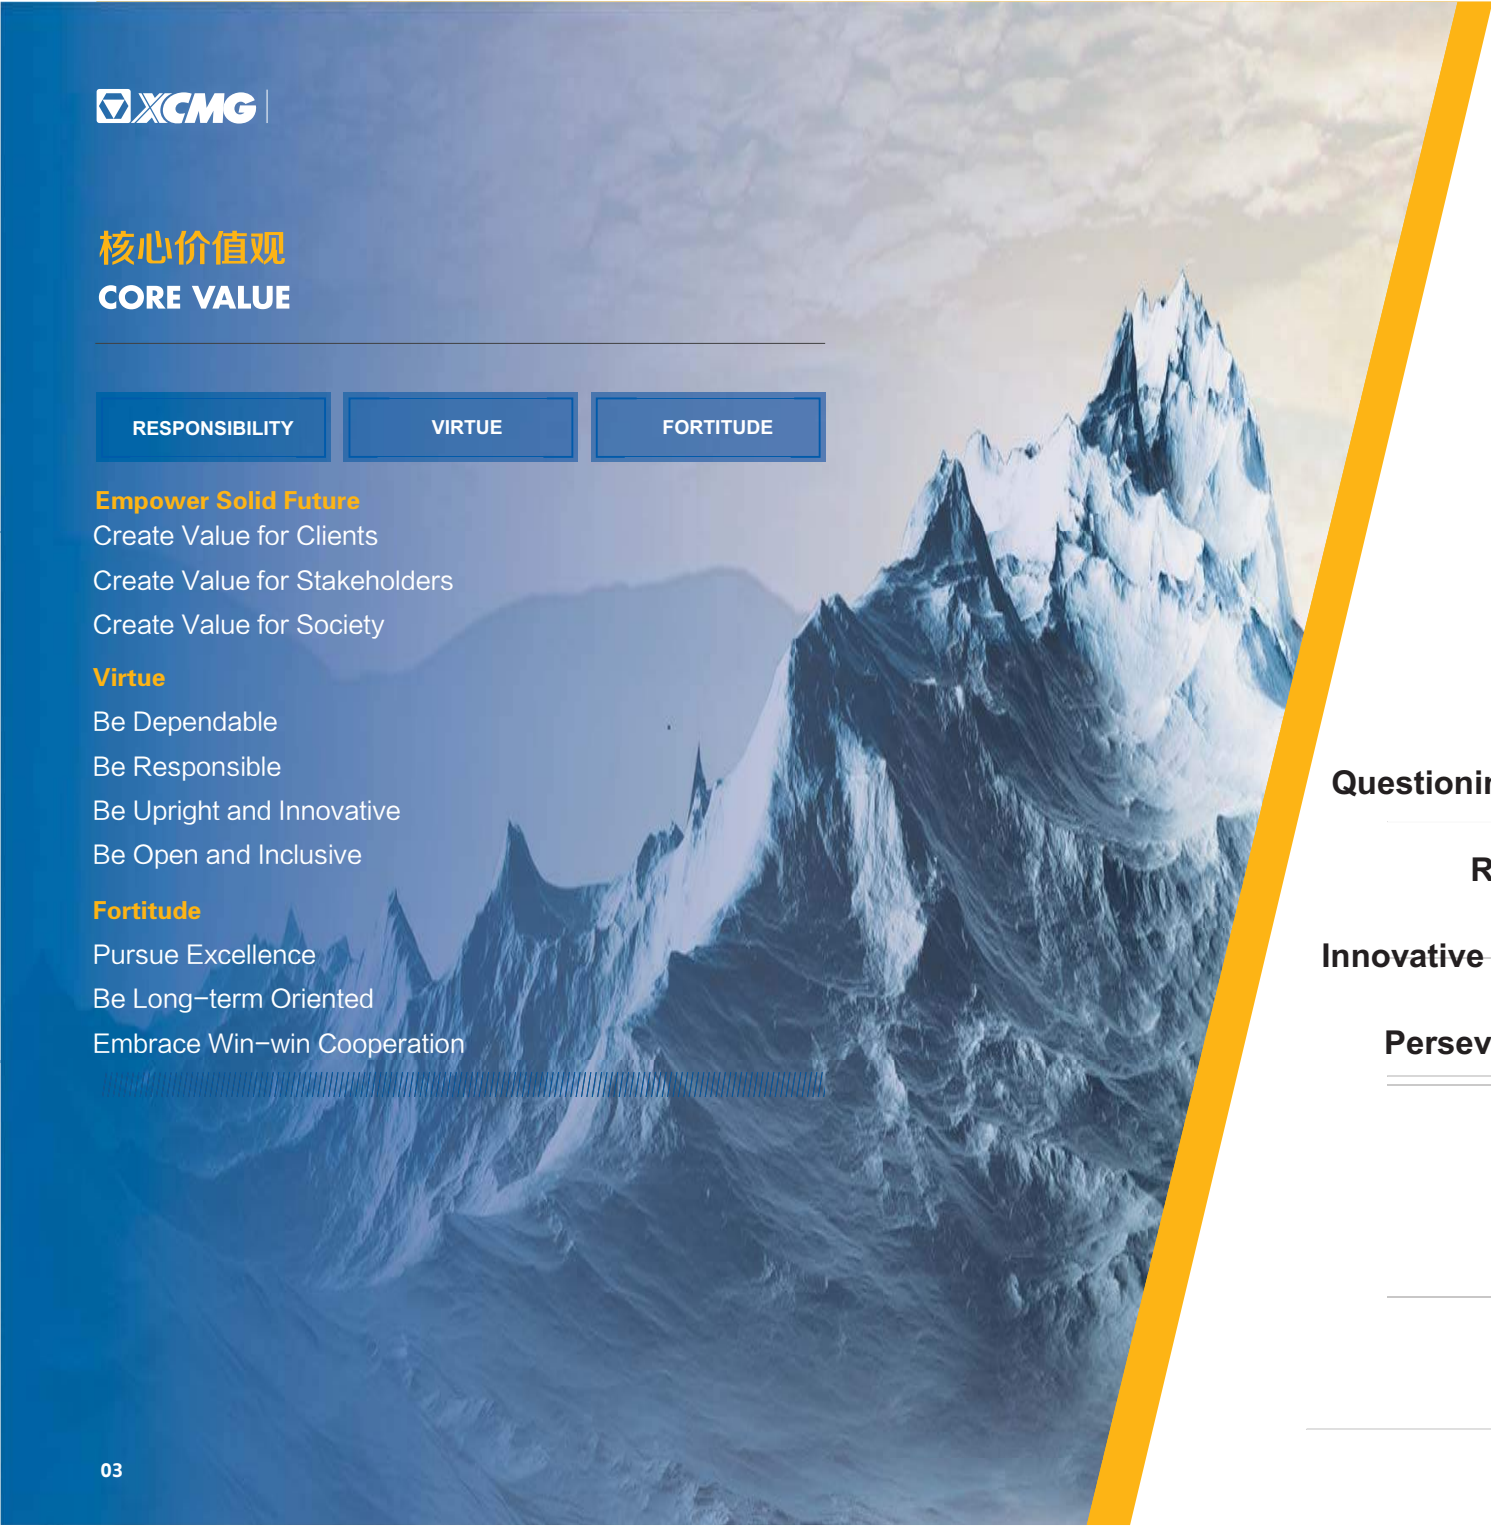

核心价值观
CORE VALUE

RESPONSIBILITY	VIRTUE	FORTITUDE

Empower Solid Future

Create Value for Clients

Create Value for Stakeholders

Create Value for Society

Virtue

Be Dependable

Be Responsible

Be Upright and Innovative

Be Open and Inclusive

Fortitude

Pursue Excellence

Be Long-term Oriented

Embrace Win-win Cooperation

Our Mission&Vision

Empower Solid Future

Our Spirits

Questioning Spirit to Develop Critical Thinking

Revolutionary Spirit on Self-reflection

Innovative Spirit to Seek and Adapt to Changes

Persevering Spirit to Overcome Challenges

INDUSTRIAL LAYOUT



R&D Center in Brazil



R&D Center in Australia



R&D Center in Germany



R&D Center in the United States



R&D Center in India



General Research Institute



INTERNATIONAL BASES

- XCMG Brazil Manufacturing Base
- XCMG Germany Manufacturing Base
- XCMG South Asia Manufacturing Base
- XCMG Mexico KD Factory
- XCMG Uzbekistan KD Factory
- XCMG Germany FT Factory
- XCMG Schwing Austria Manufacturing Base
- XCMG Schwing Germany Manufacturing Base
- XCMG Schwing America Manufacturing Base
- XCMG Schwing Brazil Manufacturing Base

...

XCMG Global

190+ Sales countries and regions

300+ Dealers

50+ Subsidiaries

2000+ Service terminals

6 R&D centers

70+ Spare parts centers

10+ Overseas factories



XCMG EARTHMOVING MACHINERY BUSINESS DIVISION



Company Profile

XCMG Earthmoving Machinery Business Division is a core machinery R&D and manufacturing enterprise under XCMG, specializing in the research and development, manufacturing, and sales services of a full range of loaders from 0.4 to 35 tons, including new energy loaders, skid-steer loaders, and backhoe loaders. It is the first enterprise in China and the third globally to possess the production capacity of loaders with a loading capacity exceeding 35 tons. For 35 consecutive years, it has maintained its position as the top loader exporter in China.

XCMG Earthmoving Machinery Business Division has always adhered to the core values of "Responsibility, Virtue, and Fortitude." XCMG perseveres through challenges and forges ahead with determination!

Development History



1949

Xuzhou Private Shunhe Automobile Repair Shop



1981

Listed as a key enterprise by the National Agricultural Machinery



1975

ZL40, XCMG's first real loader, was born.



1985

In collaboration with Kawasaki of Japan, the KLD85Z loader was produced.



1988

The XCMG ZL50D loader was successfully developed and became the largest tonnage loader at that time.



1989

The XCMG ZL50D loader was successfully developed and became the largest tonnage loader at that time.



1994

Fifty ZL50D loaders were exported overseas, marking the largest single-batch export of construction machinery from China at that time.



1996

Xuzhou Construction Machinery Co., Ltd. went public.

Growth and progress
Stepping toward the world

Development History

Transformation and upgrading Determined to reach the peak



2003

XCMG became the first group in the domestic industry with both operation revenue and sales income exceeding 10 billion yuan.




2010

LW1200K, the domestically self-developed largest tonnage loader, was successfully



2012

The XCMG Earthmoving Machinery Business Division was established.



2016

Global Launch of "Industry Ecology +" and V-Series New Products



2020

XCMG's XC9350, the only one in China and the third in the world in terms of ultra-large tonnage wheel loaders, made its debut at Bauma China in Shanghai.



2024

The XC9108EV was launched, becoming the world's largest pure electric wheel loader.

Overseas Base



XCMG Poland Factory

The XCMG Earthmoving Machinery Business Division has always adhered to the development concept of "Empower Solid Future" and has deeply promoted the “intelligent revolution, digital transformation, global connection” and “the five modernizations”. As the main force of XCMG's internationalization strategy, the Business Division has established a marketing and service network covering more than 190 countries and regions worldwide, with over 210 overseas dealers, continuously providing world-leading loading machinery and comprehensive application scenario solutions to global customers.



XCMG Mexico Manufacturing Factory



XCMG Uzbekistan Joint Venture



Laos Dealer QY AUTO Vientiane Headquarters



Saudi Arabia DMC Agent



XCMG Singapore Private Limited



XCMG Argentina S.A.

Cooperation with Universities

Technical University of Munich

International collaborative innovation: jointly building a global research and development network

The intelligent welding robot project, which was collaboratively developed with the Technical University of Munich in 2022, improved the welding qualification rate to 99.6% through multi-spectral visual recognition technology.



Tsinghua University

Green and low-carbon transformation: innovative breakthroughs in new energy equipment

With the goal of carbon neutrality, XCMG and the School of Vehicle and Mobility at Tsinghua University have jointly established a joint laboratory for new energy construction machinery, focusing on the research and development of electrification and hydrogen energy technologies. In 2022, XCMG launched the world's first hydrogen fuel cell loader, the XC968-FCEV, equipped with a self-developed 90kW hydrogen fuel cell stack, offering an endurance time of up to 8 hours and zero carbon emissions.





Zhejiang University

Core technology breakthrough at Zhejiang University: solving "bottleneck" challenges

In the fields of high-end hydraulic components and core transmission systems, XCMG has jointly undertaken the national key research and development program "Research on Key Technologies for Improving the Reliability of Core Components of Construction Machinery" with Zhejiang University and other institutions of higher learning. Through material modification and optimization of precision processing techniques, the project team successfully developed a high-durability hydraulic valve manifold with a 20% increase in service life compared to imported products and a 30% reduction in costs.




Harbin Institute of Technology

Research and development of intelligent equipment: deep application of industrial internet

The digital twin system developed in collaboration with Harbin Institute of Technology can monitor the operating status of 200,000 pieces of equipment worldwide in real-time, with a fault warning accuracy rate of 92%.

Research&Development Support

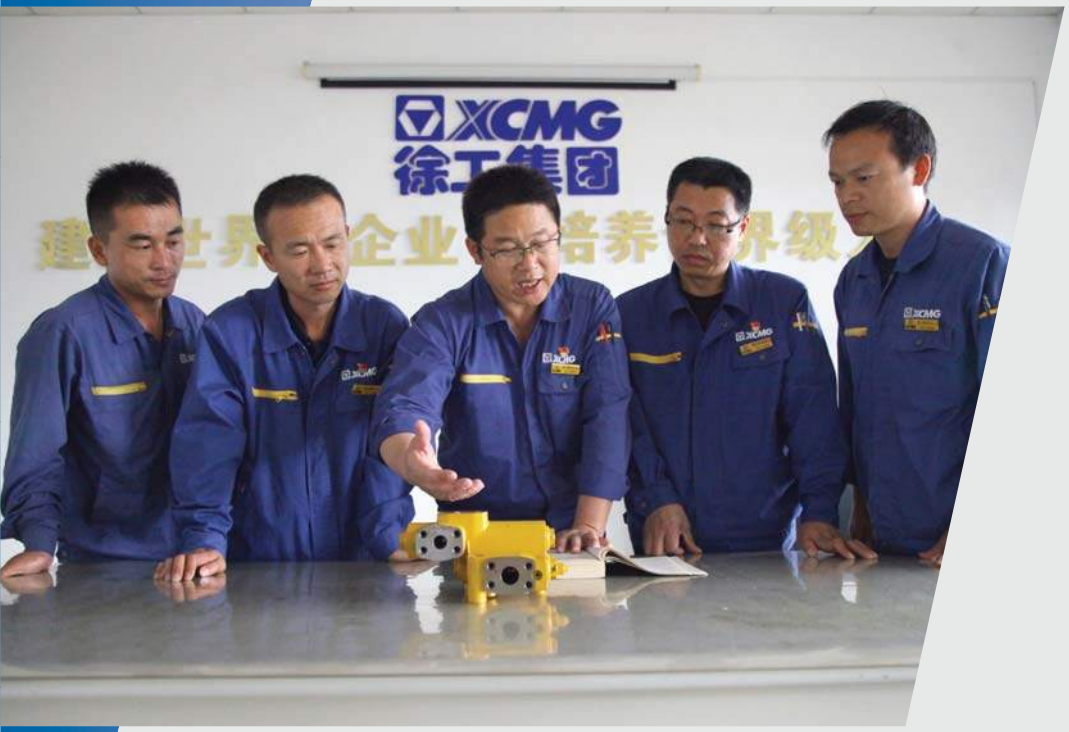

XCMG Group boasts a rich product line in the field of loading machinery, especially taking the lead in the industry in the research and development of new energy and large-tonnage equipment. With years of technical accumulation and innovation, XCMG has won numerous awards at home and abroad, demonstrating its outstanding strength and global influence in the field of construction machinery.













619 pieces
Valid intellectual property rights

577 pieces
Valid authorized patents

151 pieces
Invention patents

323 pieces
Utility model patents

103 pieces
Design patents

42 pieces
Software patents





徐工全心+
XCMG TrueCare

SERVICE SLOGAN

131400
Zero distance and zero obstacles in the lifetime

15 x 24 x 365

Response within 15 minutes | Repair within 24 hours | 365-Day and 24-hour uninterrupted service

SERVICE TENET: SERVICE MISSON

To provide exceptional services from pre-sales, mid-sales to after-sales, offering "personalized, thoughtful, full-lifecycle, and full-value chain" services that exceed expectations.

FOUR ALLS OF SERVICE

- ALL LIFE CYCLE SERVICE
- ALL 24/7 SERVICE
- ALL ROUND SERVICE
- ALL PROCESS SERVICE

FIVE ONES OF SERVICE

A promise of great integrity	Unified standards for all services	Annual inspection	Maintenance service without labor charges
Worry-free for life	To implement full-lifecycle services	Complete in every respect	Comprehensive spare parts supply
Without delay for a moment	Response within 15 minutes and arrival within 2 hours		

SPARE PARTS PRODUCT SYSTEM

OVERALL SCALE AND DEVELOPMENT STATUS

The dedicated spare parts product system of XCMG Sanyou is committed to "accuracy, timeliness, economy, and convenience" of spare parts. Always guided by market demand, its products cover loader maintenance parts, wearable parts, and repair parts, with a total of over 2,000 spare parts developed.

It has mainly developed wearable parts, maintenance parts, and repair parts, covering over 1,000 key materials in more than 20 major categories. With a complete range of products, high cost-effectiveness, and sufficient supply capacity, the offerings are more in line with market demands and can satisfy the needs of diverse customer groups at different levels in the aftermarket.

INTELLIGENT SPARE PARTS MANAGEMENT SYSTEM

- The PMS spare parts management system provides support for customers' full-lifecycle spare parts supply.

Functional module

- Scan the barcode of the material to query spare parts information.
- Achieve mobile warehouse management, allowing for tasks such as inbound and outbound inventory, querying, and stocktaking to be completed via PDA.
- Order submission, delivery receipt, shipment receipt, inventory, and purchase-sales-inventory management.
- Track order shipment execution in real-time through the shipping delivery receipt.
- Implement barcode management in the warehouse, establish warehouse storage location coding, and achieve precise inventory location.
- Enable mobile warehouse management, allowing tasks such as inbound and outbound inventory, querying, and stocktaking to be completed via PDA.
- Achieve real-time integration with the SAP system for distribution instructions, read distribution list information, and automatically update inbound inventory information.
- Achieve interconnection with e-commerce business,

Service Beyond Boundaries

Wherever there is a need for equipment, there is also a need for service, and wherever there is a customer's need, there is the presence of XCMG service engineers.

We are not afraid of overcoming difficulties and obstacles, and are always committed to resolving various faults in equipment operating overseas, eliminating customer doubts, and addressing potential equipment issues. We are dedicated to ensuring that customers worldwide truly benefit from XCMG's services!



Africa + Uganda + Oilfield project scenario



Launch Ceremony for the "Million-Mile Service Tour



Africa + Ghana + Infrastructure project scenario



Assure the operation of machinery and equipment in high-altitude areas




Service personnel working on the Sichuan-Tibet Highway

Rescue and Disaster Relief



Disaster relief at the Dulongjiang Tunnel

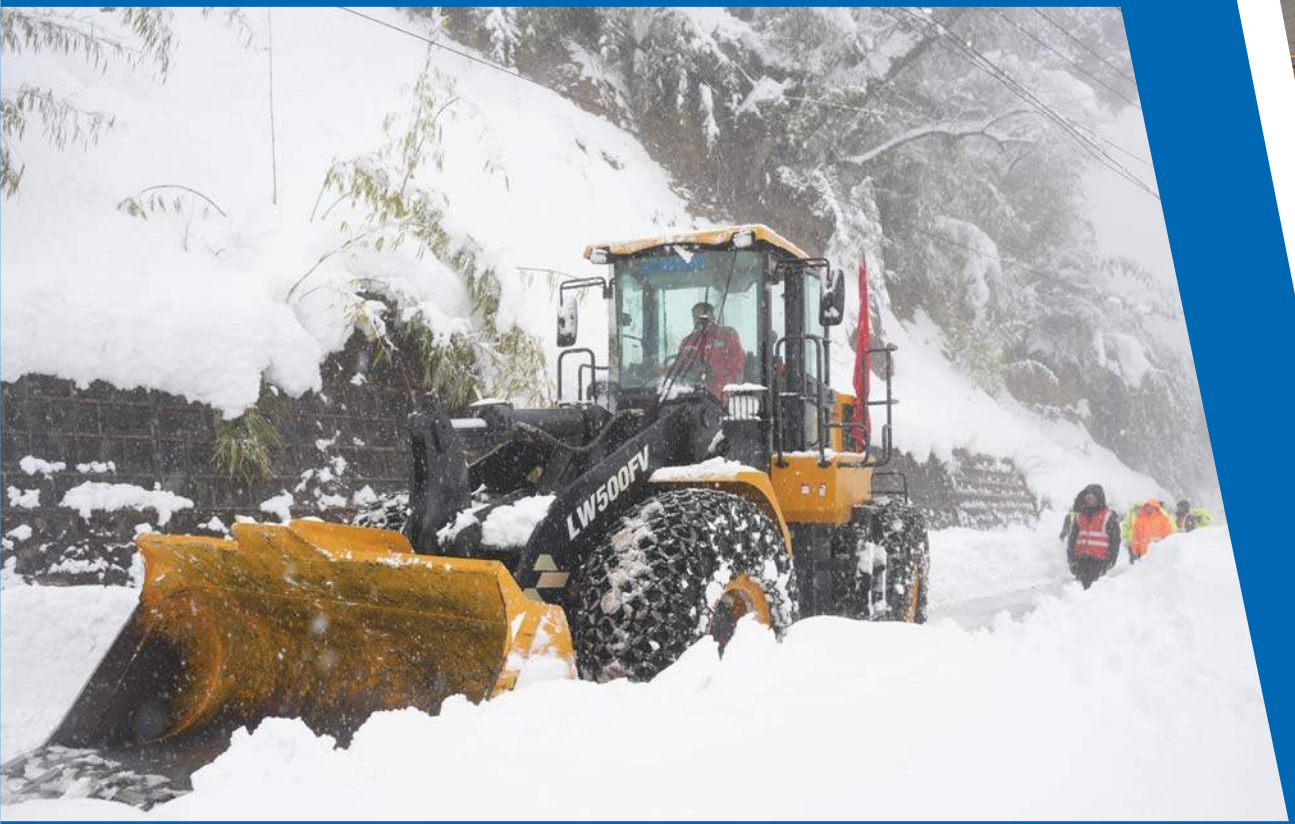

Disaster relief at the Dulongjiang Tunnel



Disaster relief in Tibet



Emergency snow removal in Hubei

Public Benefit

XCMG is not only a global giant in construction machinery that helps people transform nature, build homes, explore the future, and achieve success, but also a global paradigm that combines strength with compassion, contributes to harmonious coexistence with the world, and strives to make the world a better place for tomorrow.



At the Brazil station, the "Little Genies Show Their Talents", where children volunteer to showcase their various talents to the volunteers.



Contributing to the beauty of Bangladesh



XCMG Small Wishes – Indonesia Tour

Corporate Culture

It showcases the spirited, dynamic, and striving ethos of XCMG's workforce, serving as a vibrant stage that exudes passion, vitality, and boundless energy. Over the span of thirty years, as time has passed, what remains unchanged is everyone's expression of emotions through song, conveyance of feelings through dance, and articulation of aspirations through drama, all of which vividly showcase the vibrant and dynamic spirit of the new era of XCMG.

The opening ceremony, closely aligned with frontline realities and reflective of employees' lives, aims to tell the XCMG story well. It integrates professional performances with creative concepts and artistic presentations, combining various art forms to deliver a vibrant and spectacular artistic feast.



Employees' Sports Games



Employees' Sports Games



Employees' Sports Games



Employees' Culture and Art Festival




Employee Parent-Child Activities

Product Profile

3
Three major categories

100+
More than 100 products

190+
Exported to over 190 countries and regions

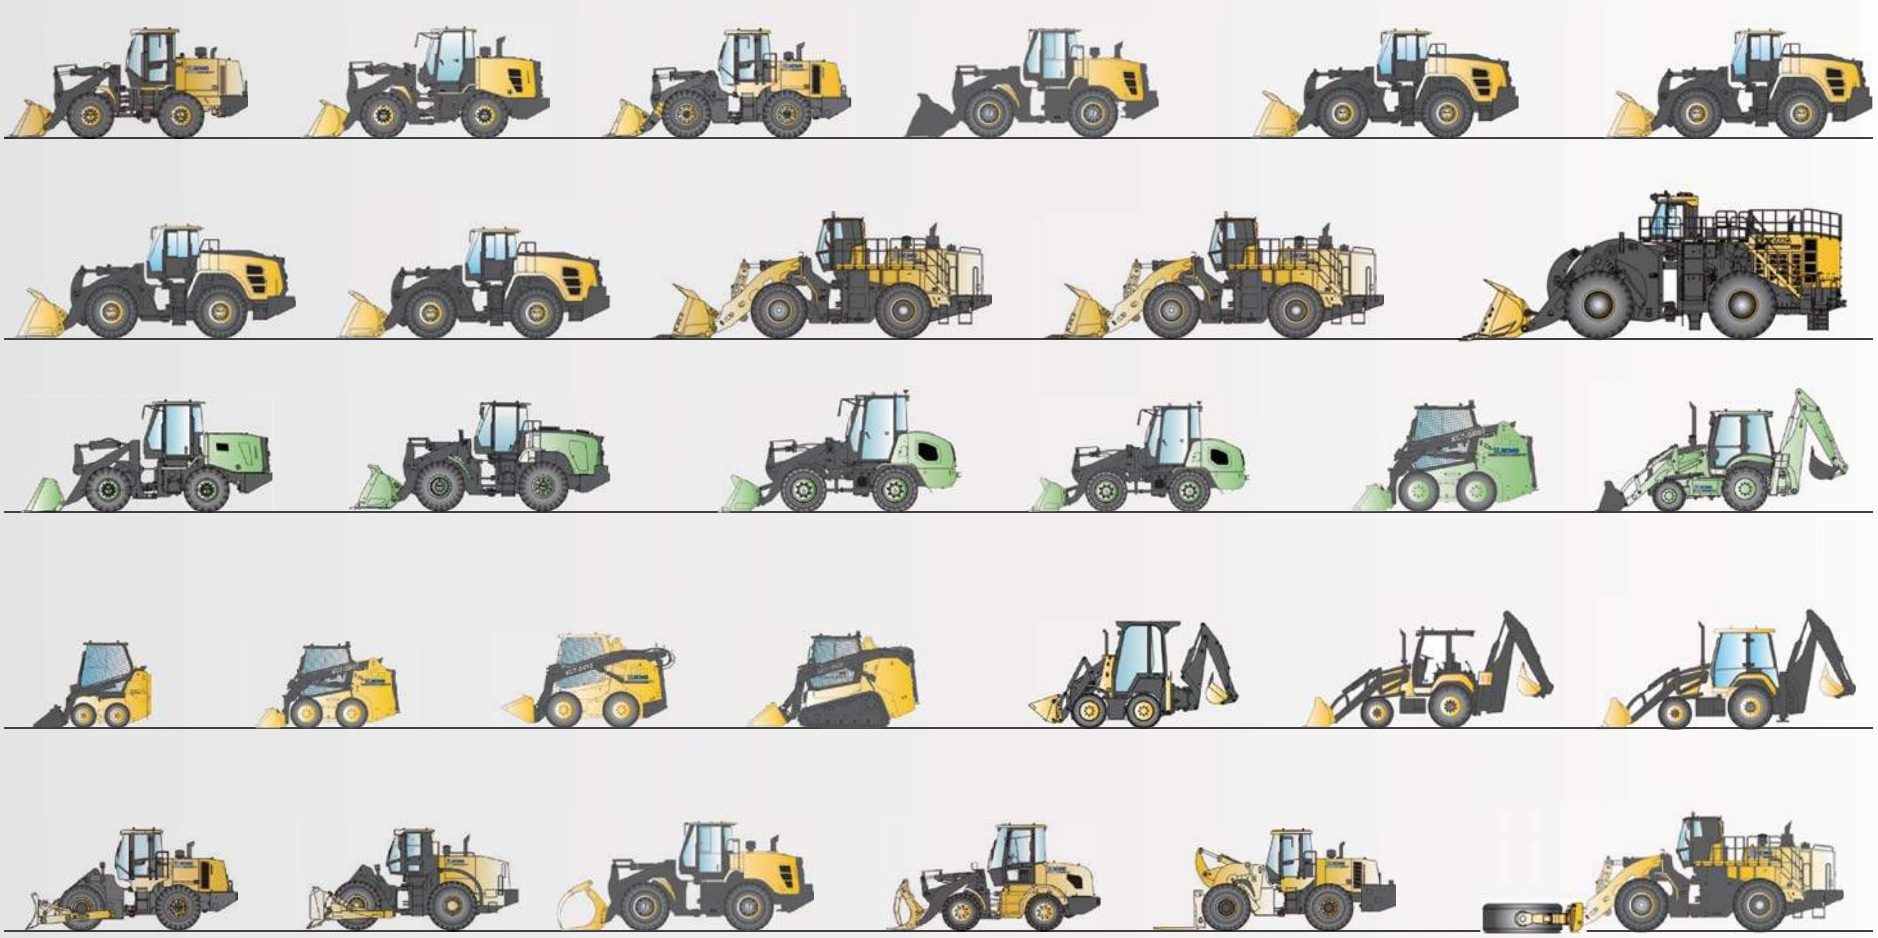

XCMG

02 Wheel Loader





Wheel Loader

Compact

XC906HST	LW150FV	LW180K(LW180KV/LW180KE)
XC908HST	LW160FV	LW180M
XC910HST	LW180FV	LW200K（LW200KV）
XC918HST	LW200FV	
	LW230FV	

Medium

XC936	XC938	XC948
XC956	XC958	XC968

Large

XC975	XC978	XC988
XC998	XC9108	

Ultra-Tonnage

LW1200KN	XC9150	XC9260
XC9350		

1 Compact Wheel Loader

LW150FV



Product Highlights

●The hydraulic system connectors adopt a dual sealing form, providing better sealing performance and more reliable functionality; the pipelines have been centrally organized, resulting in a more reasonable layout.

●Equipped with a powerful China-II standard engine, it can efficiently handle both loading and traction tasks in conjunction with the ZD, without stalling; the machine's thermal balance temperature can reach above 45 degrees Celsius, making it suitable for prolonged high-temperature operations of D5E;

●Core and important electrical components are installed inside the cab for better dustproof, waterproof, and shock-resistant effects; the centralized fuse box with blade fuses facilitates easy and quick inspection and maintenance;

●The working device has undergone three-dimensional motion simulation and calculation to assure a larger transmission angle (≥10 degrees) at any position during its movement. It can effectively assure free loading and unloading at any position during operation.

Main Technical Parameters

Parameters	LW150FV
Operating Weight	4280kg
Rated Load	1200kg
Bucket Capacity	0.7m³
Dumping Height	3180mm
Emission Stage	China II
Rated Engine Power	50kW
Maximum Overall Dimensions (L*W*H)	5600x1900x2700mm

LW160FV

Product Highlights

●The engine, transmission, and drive axle are perfectly combined, providing powerful dynamics, high efficiency, and low fuel consumption;

●The transmission oil fill, grease filling, pressure measurement port, and brake fluid filling are all reachable.

●The long wheelbase assures stable loading, and the 35° steering angle allows for maneuverability in narrow spaces; the frame, articulation, steering, and other structures are stronger, providing better adaptability for heavy loads.

●The entire hood can be opened with a large angle forward flip, facilitating maintenance.

Main Technical Parameters

Parameters	LW160FV		
Operating Weight	4800kg	4800kg	4970kg
Rated Load	1200kg	1100kg	1000kg
Bucket Capacity		0.7m³	
Dumping Height	3000mm	3300mm	3500mm
Height to hinge pin, fully raised		3910mm	
Emission Stage		China III	
Rated Engine Power		54.5kW	
Maximum Overall Dimensions (L*W*H)	5890x2060x2800mm	6100x2060x2800mm	6400x2060x2800mm



LW180FV



Product Highlights

●The engine, transmission, and drive axle are perfectly combined, providing powerful dynamics, high efficiency, and low fuel consumption;
●The long wheelbase assures stable loading, and the 35° steering angle allows for maneuverability in narrow spaces; the frame, articulation, steering, and other structures are stronger, providing better adaptability for heavy loads.
●The transmission oil fill, grease filling, pressure measurement port, and brake fluid filling are all reachable.

Main Technical Parameters

Parameters	LW180FV
Operating Weight	5450kg
Rated Load	1300kg
Bucket Capacity	1m^3
Dumping Height	3470mm
Height to hinge pin, fully raised	4185mm
Emission Stage	China III
Rated Engine Power	61.8kW
Maximum Overall Dimensions (L*W*H)	6600x2060x2850 mm

LW180K (LW180KV/LW180KE)

Product Highlights

●The dust-proof lubrication structure is adopted for main pivot points to prevent grease from dust and contamination, and provide reliable protection for hinge pins and bushings;
●Core and important electrical components are installed inside the cab for better dustproof, waterproof, and shock-resistant effects; the forward-tilting rear hood opens to a large angle, making it convenient for maintenance and replacement of components;
●The cab features a spacious interior with full glass, providing unobstructed visibility; it boasts luxurious interior decoration, excellent sealing, high-end seating, and comfortable operation;
●The structural components are designed using computer-aided design to withstand extreme heavy loads; they are securely fastened and reliable, providing good operational stability, enhanced safety, and broader applicability.

Main Technical Parameters

Parameters	LW180K/KV/KE		
Operating Weight	6200kg		
Rated Load	1800kg		
Bucket Capacity	1.1m^3		
Dumping Height	2650mm		
Emission Stage	China II	China III	Euro-V
Rated Engine Power	58kW	58.8kW	55.8kW
Maximum Overall Dimensions (L*W*H)	6045x2060x2950mm		



LW180M



Product Highlights

●It boasts powerful dynamics, high efficiency, and low fuel consumption, along with comfortable operation. The gearshift has a cushioning function, and the rear hood can be opened to facilitate maintenance and servicing;

●The steering system employs an articulated frame with full hydraulic steering; it features a single-rocker-arm, reverse "Z"-shaped six-linkage mechanism, and offers a variety of optional working devices (standard arm, high-dump arm) and attachments (buckets, pile-turning buckets, etc.).

●Core and critical electrical components are installed inside the cab for superior dustproof, waterproof, and shock-resistant performance; the forward-tilting rear hood opens to a wide angle, making it convenient for maintenance and component replacement;

●The cab features a spacious interior with full glass, providing unobstructed visibility; it boasts luxurious interior decoration, excellent sealing, high-end seating, and comfortable operation;

Main Technical Parameters

Parameters	LW180M
Operating Weight	6300kg
Rated Load	1800kg
Bucket Capacity	1m^3
Dumping Height	2580mm
Height to hinge pin, fully raised	3080mm
Emission Stage	China III
Rated Engine Power	58.8kW
Maximum Overall Dimensions (L*W*H)	6125x2060x2950mm

LW200FV

Product Highlights

●The engine, transmission, and drive axle are perfectly combined, providing powerful dynamics, high efficiency, and low fuel consumption;
The transmission oil fill, grease filling, pressure measurement port, and brake fluid filling are all reachable.

●The long wheelbase assures stable loading, and the 35° steering angle allows for maneuverability in narrow spaces; the frame, articulation, steering, and other structures are stronger, providing better adaptability for heavy loads.

Main Technical Parameters

Parameters	LW200FV
Operating Weight	6100kg
Rated Load	1600kg
Bucket Capacity	1m^3
Dumping Height	3470mm
Height to hinge pin, fully raised	4185mm
Emission Stage	China III
Rated Engine Power	78kW
Maximum Overall Dimensions (L*W*H)	6650x2060x2850mm



LW200K (LW200KV)



Product Highlights

●The dust-proof lubrication structure is adopted for main pivot points to prevent grease from dust and contamination, and provide reliable protection for hinge pins and bushings;

●Core and important electrical components are installed inside the cab for better dustproof, waterproof, and shock-resistant effects; the forward-tilting rear hood opens to a large angle, making it convenient for maintenance and replacement of components;

●The cab boasts a spacious interior with full glass, providing unobstructed visibility; it features luxurious interior decoration, excellent sealing, high-end seating, and a standard fan for comfortable operation.

●The structural components are designed using computer-aided design to withstand extreme heavy loads; they are securely fastened and reliable, providing good operational stability, enhanced safety, and broader applicability.

Main Technical Parameters

Parameters	LW200K/KV	
Operating Weight	6300kg	
Rated Load	2000kg	
Tipping Load (straight)	4400kg	
Bucket Capacity	1.1m³	
Dumping Height	2650mm	
Height to hinge pin, fully raised	3343mm	
Emission Stage	China II	China III
Rated Engine Power	66kW	66.2kW
Maximum Overall Dimensions (L*W*H)	6045x2060x2950mm	

LW230FV

Product Highlights

●The product structure is reliable, with a maximum dumping height of up to 4.5 meters;

●The long wheelbase assures stable loading, and the 35° steering angle allows for easy maneuverability in narrow spaces; the frame, articulation, steering, and other structures are reinforced for enhanced durability and adaptability.

●The transmission oil fill, grease filling, pressure measurement port, and brake fluid filling are all reachable.

Main Technical Parameters

Parameters	LW230FV
Operating Weight	6600kg
Rated Load	2000kg
Bucket Capacity	1.2m³
Dumping Height	3500mm
Height to hinge pin, fully raised	4200mm
Emission Stage	China III
Rated Engine Power	88.2kW
Maximum Overall Dimensions (L*W*H)	6780x2170x2900mm



XC906HST



Product Highlights

●Adopting hydrostatic transmission technology, the machine features a lightweight design with a compact layout, offering high comfort, ease of maintenance, and reliability; it can switch the motor displacement in real-time according to the vehicle's load, providing sufficient traction at all times;
●The rear-tilting hood provides easy access to the engine, radiator, hydraulic oil tank, and filter elements inside the engine compartment for maintenance and servicing. The side-tilting cab provides convenient access for inspection and maintenance.
●CAE simulation analysis assures high safety coefficients. The front and rear frames adopt an integral frame structure to withstand resistance and impact loads under various working conditions; equipped with a forward-rotating six-bar linkage mechanism, it provides excellent lifting force and translational motion, assuring strong operational reliability and good visibility.

Main Technical Parameters

Parameters	XC906HST
Operating Weight	2500kg
Rated Load	600kg
Bucket Capacity	0.4m³
Emission Stage	Euro-V
Rated Engine Power	17.8kW
Maximum Overall Dimensions (L*W*H)	3860x1570x2310mm

XC908HST

Product Highlights

●Compact and agile with powerful performance: the machine features a lightweight design with a compact layout and a short tail design, resulting in a smaller turning radius; it adopts hydrostatic transmission with a DA control pump and HA control motor, equipped with an anti-stall function; additionally, it can switch the motor displacement in real-time according to the vehicle's load to provide sufficient traction.
●Wide field of view and comfortable operation: the panoramic new cab features high-quality interior decoration; the FNR integrated handle meets the habit of integrated operation; it comes standard with a heater, adjustable seats, and a steering column to accommodate different percentile human body needs, providing a luxurious driving experience.
●Easy disassembly and assembly, panoramic maintenance: the 90° rear-tilting hood and 30° side-tilting cab provide panoramic access to the components inside the engine compartment for maintenance; the steering column integrates a fuse box for convenient inspection and repair.
●Diverse configurations and full functionality: it comes standard with a triple hydraulic quick-change structure and offers seven optional attachments to customize to your machinery needs; a stability module is also available as an option.

Main Technical Parameters

Parameters	XC908HST工业版	XC908HST农业版
Operating Weight	2815-2980kg	2775-2920kg
Rated Load	800kg	
Tipping Load (straight)	2020kg	1800kg
Bucket Capacity	0.4m³	
Dumping Height	1828mm	2100mm
Height to hinge pin, fully raised	2550mm	2990mm
Emission Stage	Euro-V	
Rated Engine Power	18.2kW	
Maximum Overall Dimensions (L*W*H)	4380x1570x2310mm	4235x1530x2310mm



XC910HST



Product Highlights

●Hydrostatic transmission technology, lightweight design, and compact layout provide high comfort, ease of maintenance, and reliability; it can switch the motor displacement in real-time according to the vehicle's load to provide sufficient traction at all times;

●CAE simulation analysis assures high safety coefficients. The front and rear frames adopt an integral frame structure to withstand resistance and impact loads under various working conditions; equipped with a six-bar linkage mechanism that rotates in the forward direction, it provides excellent lifting force and translational motion, assuring strong operational reliability and good visibility;

●The panoramic new cab features high-quality interior decoration, additional storage boxes, and phone holders, enhancing operational comfort; adjustable seats and steering columns cater to different needs, providing a luxurious driving experience;

●The centered hinge swing structure features centered swing and articulated steering, along with a short tail design that reduces the turning radius; the triple hydraulic quick-change structure meets users' diverse attachment selection needs;

Main Technical Parameters

Parameters	
Operating Weight	3500kg
Rated Load	1000kg
Bucket Capacity	0.4m^3
Dumping Height	2550mm
Emission Stage	Euro-V

XC918HST

Product Highlights

●Operational Comfort: the hydrostatic transmission eliminates gearshift shock, providing excellent driving comfort; the seat and steering column positions are adjustable, and the machine comes standard with a heating and cooling air conditioning system;

●High Operational Efficiency: the working device is capable of combined movements, resulting in high operational efficiency; the flow rate proportion of attachments is adjustable, and one-button cruise control allows for autonomous operation of attachments, reducing operational fatigue intensity;

●Flexible and Versatile: the centered hinge swing structure allows a swing angle of up to 20° for both the front and rear axles, making the entire machine more flexible; with ±38° articulated steering and a short tail design, the turning radius is minimized. It comes standard with a triple hydraulic quick-change structure to meet users' diverse attachment selection needs. The 100% limited-slip differential lock enables the machine to adapt to various road conditions.

●Easier Maintenance and Repair: the 45° front-tilting hood provides ample space for maintenance and repairs; the ROPS&FOPS cab with side-tilting functionality further facilitates inspection and repair.

Main Technical Parameters

Parameters	XC918HST
Operating Weight	6300kg
Rated Load	1800kg
Tipping Load (straight)	4582kg
Bucket Capacity	1m^3
Dumping Height	2660mm
Height to hinge pin, fully raised	3354mm
Emission Stage	Euro-V
Rated Engine Power	53.7kW
Maximum Overall Dimensions (L*W*H)	5520x2060x2745 mm



2 Medium Wheel Loader

XC936



Product Highlights

●With an ultra-long wheelbase design that leads the industry, the machine offers excellent stability;
It boasts strong digging force, lifting capacity, and exceptional performance;
●The high-pressure, low-flow hydraulic system minimizes pressure loss in the piping, promoting energy efficiency and reducing consumption; the hydraulic system's combined operations are completed in a short period, enhancing work efficiency; with a large steering angle, the machine offers high flexibility, increased steering pressure, and strong adaptability to uneven terrain;
●The transmission, drive axle, engine, and hydraulic system have withstood the test of the market; the structural components have been optimally designed, reducing stress in critical load-bearing areas by 10%;

Main Technical Parameters

Parameters	XC936
Operating Weight	10200kg
Rated Load	3500kg
Bucket Capacity	1.8m³
Dumping Height	2930mm
Height to hinge pin, fully raised	3839mm
Emission Stage	China II
Rated Engine Power	97kW
Maximum Overall Dimensions (L*W*H)	7250x2482x3100mm

XC938

Product Highlights

●With an ultra-long wheelbase design that leads the industry, the machine offers excellent stability;
●The high-pressure, low-flow hydraulic system minimizes pressure loss in the piping, promoting energy efficiency and reducing consumption; the hydraulic system's combined operations are completed in a short period, enhancing work efficiency; with a large steering angle, the machine offers high flexibility, increased steering pressure, and strong adaptability to uneven terrain;
●The luxurious cab comes standard with a heating and cooling air conditioning system; the pedals, buttons, and control levers inside the cab are arranged reasonably, providing friendly human-machine interaction, moderate operating force, and comfortable operation, all contributing to a first-class driving experience;
●The new XC9 exterior features large side doors and a fully openable hood, with maintenance components arranged logically to facilitate maintenance and repairs, effectively reducing unnecessary downtime;

Main Technical Parameters

Parameters	XC938	
Operating Weight	13500kg	
Rated Load	3500kg	
Bucket Capacity	1.9m³	2.1m³
Dumping Height	2850mm	2937mm
Height to hinge pin, fully raised	3839mm	
Emission Stage	Euro-V	U.S. EPA Tier 4 Final
Rated Engine Power	99kW	
Maximum Overall Dimensions (L*W*H)	7330x2482x3220mm	7725x2550x3405mm



XC948



Product Highlights

●The rated power of the engine meets various emission requirements, with large torque reserve and powerful performance; it is characterized by low fuel consumption and long service life;
●The cab offers a wide horizontal viewing angle, spacious interior, and excellent visibility; with low indoor noise levels and a standard air-suspended suspension seat, it provides safer and more comfortable operation;
●The machine's steering angle is 40° , and it comes standard with a wide-angle steering gear, providing smoother and more comfortable operation;
Optional attachments such as quick couplers, buckets, and forks can be equipped to meet the requirements of different operating conditions.

Main Technical Parameters

Parameters	XC948		
Operating Weight	13500kg	17000kg	16500kg
Rated Load	4500kg	5300kg	4500kg
Bucket Capacity	2.4m³	3m³	2.4m³
Dumping Height	3050mm	3090mm	2769mm
Height to hinge pin, fully raised	4110mm	5130mm	3969mm
Emission Stage	China II	India Stage V	U.S. EPA Tier 4 Final
Rated Engine Power	129kW	170kW	149kW
Maximum Overall Dimensions (L*W*H)	7850x2690x3300mm	8480x2996x3455mm	7882x2550x3405mm

XC956

Product Highlights

●With an ultra-long centered wheelbase of 3.3 meters and a large steering angle design of 40° , the steering stability is improved by 30%, and the steering capability is enhanced by 10%;
●The dual-pump combined hydraulic system operates at a working pressure of 20.5 MPa, reducing the operating force by 10% and completing combined operations in ≤9.3 seconds; the boom and bucket digging force are increased by 10%; the fully hydraulic dynamic load sensing steering is lightweight and agile;
●The new three-sided openable large metal hood with a 78° opening angle allows for "one-stop" maintenance and repair, making it more efficient and convenient. The hood adopts a design with a narrow front and wide rear chamfer, reducing the blind spot in the rear view of the entire machine by 20%;
●The panoramic and spacious cab offers an interior space increased by over 20%; the front windshield is made of single-curvature curved glass, and the entry door is equipped with integral glass, providing the driver with an effective field of view of 316.5° , leading the industry in terms of visibility.

Main Technical Parameters

Parameters	XC956
Operating Weight	16800kg
Rated Load	5300kg
Tipping Load (straight)	11500kg
Bucket Capacity	3m³
Dumping Height	3090mm
Height to hinge pin, fully raised	4150
Emission Stage	China II
Rated Engine Power	162kW
Maximum Overall Dimensions (L*W*H)	8325x2996x3455mm



XC958



Product Highlights

●The ultra-long centered wheelbase and large steering angle design enhance steering stability by 30% and improve steering capability by 10%;
The industry's largest articulated clearance enhances torque resistance by 10% and increases maintenance and repair space by 12%.

●The dual-pump combined hydraulic system reduces operating force by 10%, with a combined operation time of ≤9.5 seconds; and the boom and bucket digging force is increased by 10%. Fully hydraulic dynamic load sensing steering is lightweight and flexible;

●The rear-tilting hood can open at an angle of up to 65° , providing comprehensive access for maintenance and repairs. Large mudguards effectively prevent splashing.

●The protruding counterweights on both sides of the rear section, with the highest point 1.5 meters above the ground, effectively protect the machine;
The panoramic and spacious cab offers an interior space increased by over 20%; the front windshield adopts a single-curvature curved glass, and the entry door uses an integral glass, providing the driver with an industry-leading effective field of view.

Main Technical Parameters

Parameters	XC958		
Operating Weight	17230-19470kg		
Rated Load	5500kg		
Tipping Load (straight)	4150kg		
Bucket Capacity	3.1-3.5m³		
Dumping Height	2980-3070mm		
Height to hinge pin, fully raised	≥12500mm		
Emission Stage	China II/China III/India Stage V/EU Stage V/U.S. EPA Tier 4 Final		
Rated Engine Power	162-170kW		
Maximum Overall Dimensions (L*W*H)	8445x2996x3455mm	8410x3200x3455mm	8480x2996x3475mmmm

XC968

Product Highlights

●The XC9 series heavy-duty platform features a wheelbase of 3450mm, a centered layout, and an articulated clearance exceeding 1 meter, resulting in higher torque resistance;

●The large-displacement engine provides powerful performance; the transmission developed independently by XCMG is equipped with an automatic gearshift switch (KD function), featuring four forward gears and four reverse gears; with advanced performance, it offers smooth gearshifts and simplifies the driver's operation;

●XCMG's self-developed reinforced drive axle features a front axle with a load-carrying capacity of up to 40 tons (static load), assuring reliable quality;
The hydraulic system is powerful, with a maximum lifting capacity of 9.3 tons, providing stronger operating capabilities. The combined time for three operations is ≤10s, resulting in higher work efficiency;

●The dual-pump combined hydraulic system with a flow-amplifying steering system comes standard with a pilot control lever, providing low operating force and high comfort; With a steering angle of 40° , the turning radius is smaller, allowing for more flexible turning;

Main Technical Parameters

Parameters	XC968		
Operating Weight	19800-22900kg		
Rated Load	5000-6500kg		
Tipping Load (straight)	≥15000kg		
Bucket Capacity	3.5m³		
Dumping Height	3030-3250mm		
Height to hinge pin, fully raised	4270mm		
Emission Stage	China-II	China-II	Euro-V/U.S. EPA Tier 4 Final
Rated Engine Power	178/224kW		
Maximum Overall Dimensions (L*W*H)	10220x3610x3515mm	8550x3200x3455mm	8680x2996x3505mm



3 Large Wheel Loader

XC975



Product Highlights

●The XC9 series heavy-duty platform features a wheelbase of 3450mm, a centered layout, and an articulated clearance exceeding 1 meter, providing higher torque resistance;

●The large-displacement engine delivers powerful performance and comes standard with 750/65R25 wide-base tires for strong ground grip; the transmission developed independently by XCMG is equipped with an automatic gearshift switch (KD function), featuring four forward gears and four reverse gears; with advanced performance, it provides smooth gear-shifts, simplifying the driver's operation;

●The hydraulic system is powerful, with a maximum lifting capacity of 11 tons, providing stronger operating capabilities. The combined time for three operations is ≤10s, resulting in higher work efficiency;

●The dual-pump combined hydraulic system with a flow-amplifying steering system comes standard with a pilot control lever, which requires less operating force and offers high comfort; the steering angle is 40° , resulting in a smaller turning radius and more flexible turning;

Main Technical Parameters

Parameters	XC975	
Operating Weight	23300kg	22800kg
Rated Load	7000kg	
Tipping Load (straight)	≥16000kg	
Bucket Capacity	4.5m³	
Dumping Height	3400mm	
Height to hinge pin, fully raised	4600mm	
Emission Stage	Euro-V	China III
Rated Engine Power	210kW	199kW
Maximum Overall Dimensions (L*W*H)	8595x3300x3455mm	8845x3300x3455mm

XC978

Product Highlights

●XCMG's exclusive high-performance engine is custom-tuned with a scientific match, providing powerful performance and low fuel consumption;
The fully automatic electric control box features advanced performance and is equipped with an automatic gearshift switch (KD function), which simplifies the driver's operation and effectively reduces their workload;

●The fixed-variable hydraulic system can optimize energy consumption distribution based on operational requirements, achieving a 5% energy saving;

●The pilot control lever integrates FNR functionality, providing excellent controllability; it is equipped with lifting limit and automatic leveling functions, which reduce operational fatigue;

●With multi-attachment configurations, it offers three different heights of connecting links and various sizes of buckets, providing better adaptability to different working conditions.

Main Technical Parameters

Parameters	XC978	
Operating Weight	23430-27280kg	
Rated Load	7000-7800kg	
Tipping Load (straight)	≥17700kg	
Bucket Capacity	4.2-4.5m³	
Dumping Height	3220mm	
Height to hinge pin, fully raised	4395mm	
Emission Stage	China-II/China-III/Euro-V	
Rated Engine Power	210-242kW	
Maximum Overall Dimensions (L*W*H)	8850x3230x3620mm	8750x3230x3620mm



XC988



Product Highlights

●XCMG's exclusive high-performance engine is custom-tuned with a scientific match, providing powerful performance and low fuel consumption;

●The fully automatic electric control box features advanced performance and is equipped with an automatic gearshift switch (KD function), which simplifies the driver's operation and effectively reduces their workload;

●With vehicle-level NVH optimization, the noise level inside the cab is below 76 dB; the high-sealing, positive-pressure cab is equipped with an automatic heating and cooling air conditioning system, providing a quieter and more comfortable indoor operating environment;

●The fixed-variable hydraulic system can optimize energy consumption distribution based on operational requirements, achieving a 5% energy saving; with flow amplification, steering is effortless; the steering angle can reach 40 degrees, and the hydraulic flexible shaft limits the movement, with the control lever linked to the seat for comfortable and reliable driving;

Main Technical Parameters

Parameters	XC988	
Operating Weight	25060-27300kg	
Rated Load	8500kg	
Tipping Load (straight)	≥20000kg	
Bucket Capacity	4.5-6.0m³	
Dumping Height	3140/3390mm	
Height to hinge pin, fully raised	4395mm	
Emission Stage	China III	
Rated Engine Power	250kW	
Maximum Overall Dimensions (L*W*H)	8950x3230x3620mm	9140x3230x3620mm

XC998

Product Highlights

●The efficient torque converter, combined with a fully variable working hydraulic system and an intelligent independent cooling system, improves fuel economy by 3%.

●The heavy-duty wet drive axle features an optimized bridge housing that enhances its load-bearing capacity and bending resistance by 10%; the articulated clearance is increased by 13%, providing strong load-bearing capacity, high reliability, and excellent driving stability.

●Improvements to the hydraulic oil tank configuration enhance the oil suction environment, extending the pump's service life by 5%.

●The ROPS&FOPS cab features a large arc hyperboloid and integral glass design, providing a 316.5° field of view; the one-piece rear-tilting engine hood can open to an angle of 65° for easy maintenance and repair.

Main Technical Parameters

Parameters	XC998	
Operating Weight	30500kg	
Rated Load	9000kg	
Tipping Load (straight)	≥23020/32000kg	
Bucket Capacity	5.4m³	
Dumping Height	3300mm	
Height to hinge pin, fully raised	4600mm	
Emission Stage	China III	Euro-V
Rated Engine Power	277kW	265kW
Maximum Overall Dimensions (L*W*H)	9560x3430x3770mm	



XC9108



Product Highlights

●The Cummins X12 engine boasts high reliability, high adaptability, low fuel consumption, and low emissions, making it capable of meeting the needs of various working conditions;
●The electronically controlled transmission offers four forward gears and four reverse gears, with electronic automatic shifting; it features KD gear, neutral start protection, and gear lock functions; it adopts a heavy-duty wet drive axle, with the front axle equipped with a differential lock function.
●The load-sensitive, fully variable hydraulic system utilizes dual-pump combining technology in the working control system, significantly improving fuel efficiency and work productivity;
●XCMG's new ROPS&FOPS micro-pressurized cab offers ample space, a broad field of view, and excellent sealing performance; the intelligent temperature-controlled high-power heating and cooling air conditioning assures a comfortable operating temperature.

Main Technical Parameters

Parameters	XC9108
Operating Weight	32000kg
Rated Load	11000kg
Bucket Capacity	6.2m³
Dumping Height	3250mm
Emission Stage	China III
Rated Engine Power	277kW
Maximum Overall Dimensions (L*W*H)	9560x3430x3770mm

4 Ultra-Tonnage Wheel Loader

LW1200KN

Product Highlights

●The 19L turbocharged, high-pressure common-rail electronic fuel injection engine, paired with a self-developed torque converter with large energy capacity, enhances the efficient working range by over 15%;
The fully hydraulic, maintenance-free wet drive axle with independent cooling offers quick response, smooth braking, and reliable safety performance;
●The load-sensing variable hydraulic system employs electro-hydraulic proportional control for more precise control, achieving over 10% energy savings and enabling cushioning and shock absorption;
●The integral ROPS&FOPS cab meets "CE" requirements and features excellent sealing performance, with noise levels not exceeding 75dB(A) at the driver's ears; the micro-pressurized high-power automatic heating and cooling air conditioning and electrically heated seats create a thoughtful and comfortable operating environment.

Main Technical Parameters

Parameters	LW1200KN
Operating Weight	52500kg
Rated Load	12000kg
Tipping Load (straight)	32900kg
Bucket Capacity	6.5m³
Dumping Height	3838mm
Height to hinge pin, fully raised	5662/5230
Emission Stage	China III
Rated Engine Power	418kW
Maximum Overall Dimensions (L*W*H)	12358x3890x4442mm



XC9150



Product Highlights

●The load-sensing variable hydraulic system employs electro-hydraulic proportional control forThe entire vehicle adopts four-wheel independent drive and is equipped with anti-slip and electronic differential functions;
●The load-sensing variable hydraulic system employs electro-hydraulic proportional control forComfortable and convenient: the noise level inside the cab is below 75 dB, and the high-sealing cab is matched with an automatic heating and cooling air conditioning system, providing a quieter and more comfortable indoor operating environment;
●The load-sensing variable hydraulic system employs electro-hydraulic proportional control forElectronically controlled joystick steering and electro-hydraulic proportional control reduce operator fatigue;
●The load-sensing variable hydraulic system employs electro-hydraulic proportional control forThe fully hydraulic wet braking system ensures safety and reliability; operational efficiency is increased by 20%, and fuel economy is improved by 25%.

Main Technical Parameters

Parameters	XC9150
Operating Weight	55000kg
Rated Load	15000kg
Tipping Load (straight)	42000kg
Bucket Capacity	7.7m^3
Dumping Height	3920mm
Height to hinge pin, fully raised	5882mm
Emission Stage	China III
Rated Engine Power	563kW
Maximum Overall Dimensions (L*W*H)	12700x3980x4315mm

XC9260

Product Highlights

●The load-sensing variable hydraulic system employs electro-hydraulic proportional control forThe entire machine adopts four-wheel independent drive technology and electronically controlled positive flow hydraulic technology; the drive system and hydraulic system are decoupled in design; compared to similar-class hydraulic transmission models, it offers a 25% increase in operational efficiency and a 20% reduction in fuel consumption;
●The load-sensing variable hydraulic system employs electro-hydraulic proportional control forThe all-view cockpit offers an 18% increase in operating space and is equipped with standard intelligent control systems such as joystick steering, automatic fire extinguishing, and cab pressurization, making driving safer and more comfortable;
●The load-sensing variable hydraulic system employs electro-hydraulic proportional control forIt is targeted at mid-to-high-end opencast mine customers worldwide and is compatible with 70-140-ton mining trucks (recommended pairing: XCMG's XDR100/XDE130 double-axle rigid mining trucks).

Main Technical Parameters

Parameters	XC9260	
Operating Weight	125000 (standard)	127000kg ((high lift)
Rated Load	26000kg	23000kg
Tipping Load (straight)	64000kg	61000kg
Bucket Capacity	11.5m^3	
Dumping Height	4726mm	5229mm
Height to hinge pin, fully raised	6985mm	7485mm
Emission Stage	China III/TII	
Rated Engine Power	783kW	
Maximum Overall Dimensions (L*W*H)	16000×4844×5762mm	16202×4844×5762mm



XC9350



Product Highlights

●The load-sensing variable hydraulic system employs electro-hydraulic proportional control forThe entire machine adopts four-wheel independent drive technology and AC-DC-AC high-voltage electric drive system, featuring high transmission efficiency and fast response speed; it is equipped with special functions such as anti-slip, limp-home, and automatic protection; the localized high-voltage electrical system, transfer case, and wheel hub reducer have low maintenance and service costs;
Integrated electro-hydraulic braking with electric braking as the priority reduces mechanical brake wear;
●The load-sensing variable hydraulic system employs electro-hydraulic proportional control forXC-MG's core independent "electro-hydraulic proportional intelligent control system + electronically controlled positive flow hydraulic system + load-sensing electronically controlled joystick steering system" enables precise and efficient composite actions such as shoveling, driving, and steering during operation;
●The load-sensing variable hydraulic system employs electro-hydraulic proportional control forThe main structural components are made of low-temperature high-strength structural steel, and the working device features a double-rocker arm structure, making it suitable for harsh operating conditions with variable loads; the lightweight design improves the overall vehicle's working efficiency and increases the payload;
●The load-sensing variable hydraulic system employs electro-hydraulic proportional control forThe intelligent human-machine visual interaction system provides real-time, safe, convenient, and fast monitoring and diagnosis of the vehicle's operational information, equipped with a comprehensive safety protection system.

Main Technical Parameters

Parameters	XC9350
Operating Weight	162570kg
Rated Load	35000kg
Tipping Load (straight)	⩾64000kg
Bucket Capacity	18m³
Dumping Height	6197mm
Height to hinge pin, fully raised	8500mm
Emission Stage	China Stage III
Rated Engine Power	970kW
Maximum Overall Dimensions (L*W*H)	17259x5695x6524mm













03

New energy product





New energy product

Pure Electric Products

XC908-EV
XC918-EV
XC938-EV
XC968-EV
XC975-EV
XC978-EV
XC988-EV
XC9108-EV
XC9260-EV
DL1050-EV
XC8-C2570EV
XC8-S2570EV
XC7-SR07EV

Hybrid Wheel Loader

XC968-HEV
XC975-HEV
XC988-HEV

Cable-Towed loader

XC958-EV

Battery-swappable loader

XC968-EV

Hydrogen Wheel Loader

XC968-FCEV

1 Pure Electric Products

XC908-EV



Product Highlights

●Replacing "oil" with "electricity" results in zero emissions and pollution; compared to fuel-powered products, it is more energy-efficient and environmentally friendly, meeting the complete equipment needs of animal husbandry, agriculture, forestry, urban construction, etc.

●The permanent magnet synchronous motor is efficient, energy-saving, safe, and reliable, with intelligent composite control of speed and torque and stepless speed variation; it can be fully charged in the fastest 1.5 hours and has an ultra-long battery life of 3-4 hours;

●The side-tilting cab and rear-tilting hood provide convenient and quick maintenance; multiple types of cabs, including the cab and canopy, are optional; the 7-inch LCD display screen offers comfortable and convenient operation; with ±9° center oscillation and ±40° articulated steering, as well as a short-tail design, the entire machine is more agile;

●It comes standard with a triple quick-change mechanism and can be optionally equipped with a high-dump arm; multiple attachments can be configured, making it a versatile machine with multiple functions;

Main Technical Parameters

Parameters	XC908-EV
Operating Weight	2850kg
Rated Load	800kg
Bucket Capacity	0.4m³
Dumping Height	1828mm
Overall Motor Power	19kW
Battery Capacity	20.5kW · h
Maximum Overall Dimensions (L*W*H)	4380x1570x2340mm

XC918-EV

Product Highlights

●Replacing "oil" with "electricity" results in zero emissions and pollution, making it more energy-efficient and environmentally friendly compared to fuel-powered products. Adopting efficient, energy-saving, safe, and reliable permanent magnet synchronous motors with intelligent composite control of speed and torque, and stepless speed variation, it meets the complete equipment needs of animal husbandry, agriculture, forestry, urban construction, etc.

●Adaptive environmental thermal management system with integrated fast and slow charging capabilities, capable of fully charging in as fast as 1 hour and offering an ultra-long battery life of 4-6 hours;

●The XC9 series features a panoramic cab with high-quality interior, an FNR pilot hydraulic system, and an 8-inch LCD display screen for comfortable and convenient operation; with ±10° center oscillation and ±38° articulated steering, it comes standard with a triple quick-change mechanism and can be configured with various attachments for versatile use;

●The side-tilting cab and front-tilting hood, along with high-voltage circuit breaker safety protection, facilitate one-stop maintenance and repair.

Main Technical Parameters

Parameters	XC918-EV	
Operating Weight	6700kg	
Rated Load	1800kg	
Bucket Capacity	1m³	
Dumping Height	2660mm	
Overall Motor Power	58kW	
Battery Capacity	70kW · h	100kW · h
Maximum Overall Dimensions (L*W*H)	5520x2060x2745mm	



XC938-EV



Product Highlights

●The 3-ton pure electric loader, with a standard battery capacity of 180 kWh, offers a continuous operation time of over 8 hours for the entire machine; it is widely used in paper mills, biomass power plants, garbage stations, grain transfer stations, and other working conditions;

●The entire machine features a single-motor direct drive without a transmission, which can increase efficiency by 15% and reduce energy consumption by 13%; with a rated power of up to 156 kW, the machine's motor provides powerful performance, leading the industry;

●The entire machine is equipped with a 180 kWh lithium iron phosphate battery that supports dual-gun fast charging, with the shortest charging time being only 45 minutes (when paired with a 240 kW charging pile); the battery thermal management system is intelligently controlled by BMS, assuring safety and reliability; it is also equipped with a liquid crystal touch screen that displays various parameters of the entire machine in real-time;

●The single-pump split-flow quantitative hydraulic system features full pilot control for steering and working devices, assuring precise and lightweight operation. Equipped with a one-touch button to increase the hydraulic motor speed, it enhances the responsiveness and operating efficiency of the hydraulic system.

Main Technical Parameters

Parameters	XC938-EV
Operating Weight	11650kg
Rated Load	3500kg
Bucket Capacity	2.1m³
Dumping Height	3120mm
Overall Motor Power	156kW
Battery Capacity	180kW · h
Maximum Overall Dimensions (L*W*H)	7600x2482x3220mm

XC968-EV

Product Highlights

●The 6-tonne pure electric loader, with a standard battery capacity of 282 kWh, has an endurance of more than 6 hours and is widely applicable to continuous operations in port warehousing, sand and gravel yards, railway freight yards, and other working conditions requiring such operations;

●The entire machine adopts self-developed control technology, with key core technologies being independently controllable; it applies a dual-motor coupling walking drive technology without a transmission; with a rated power of up to 270 kW, it boasts powerful dynamics and leads the industry; both the maneuverability and energy efficiency of the entire machine are superior to those in the industry, enabling a 18% increase in efficiency and a 13% reduction in energy consumption;

●The standard battery pack for the entire machine is 282 kWh, with optional capacities of 350 kWh and 423 kWh to cater to the endurance needs of various customers; when equipped with the standard 240 kW charging station, the charging time is only 60 minutes. The battery thermal management system is intelligently controlled by BMS, assuring safety and reliability. Equipped with a LCD touchscreen, it displays real-time parameters of the entire machine;

●The dual-pump converging quantitative hydraulic system and fully pilot-controlled steering and working devices assure precise and lightweight operation. Equipped with an FNR control lever, it allows for convenient gear shifting and features a one-button hydraulic motor speed increase function, enhancing the responsiveness and operational efficiency of the hydraulic system;

Main Technical Parameters

Parameters	XC968-EV		
Operating Weight	18970kg	19430kg	20170kg
Rated Load		6000kg	
Bucket Capacity	3.2m³	3.2m³	4.5m³
Dumping Height		3420mm	
Overall Motor Power		270kW	
Battery Capacity	282kW · h	350kW · h	423kW · h
Maximum Overall Dimensions (L*W*H)	8575x2996x3455mm	8985x2996x3455mm	8985x2996x3505mm



XC975-EV



Product Highlights

●The 7-tonne pure electric loader, with a standard battery capacity of 423 kWh, has an endurance of over 7 hours, being the choice for customers in sand and gravel yards and steel plants who require higher work efficiency;

●The entire machine adopts self-developed control technology, with key core technologies being independently controllable; it applies a dual-motor coupling walking drive technology without a transmission; with a rated power of up to 320 kW, it boasts powerful dynamics and leads the industry; both the maneuverability and energy efficiency of the entire machine are superior to those in the industry, enabling a 18% increase in efficiency and a 13% reduction in energy consumption;

●The entire machine is equipped with a 423 kWh lithium iron phosphate battery that supports dual-gun fast charging, with the shortest charging time being only 80 minutes (when paired with a 300 kW charging pile); the battery thermal management system is intelligently controlled by BMS, assuring safety and reliability. Equipped with an LCD touchscreen, it displays real-time parameters of the entire machine;

●The dual-pump converging quantitative hydraulic system features full pilot control for steering and working devices, assuring precise and lightweight operation. Equipped with an FNR control lever and a one-button hydraulic motor speed increase button, it allows for quick and responsive operation; the flow-amplifying steering system assures easy and flexible steering.

Main Technical Parameters

Parameters	XC975-EV	
Operating Weight	22600kg	
Rated Load	7000kg	
Bucket Capacity	4m³	
Dumping Height	3470mm	
Overall Motor Power	320kW	
Battery Capacity	350kW · h	423kW · h
Maximum Overall Dimensions (L*W*H)	9150x3100x3575mm	

XC978-EV

Product Highlights

●XC978-EV is a 7-tonne pure electric loader with a standard battery capacity of 423 kWh, offering an endurance of over 7 hours; it is a large 7-tonne product developed for heavy-duty conditions such as mines and ports;

●The entire machine adopts self-developed control technology, with key core technologies being independently controllable; it applies a dual-motor coupling walking drive technology without a transmission; with a rated power of up to 410 kW, it boasts powerful dynamics and leads the industry; both the maneuverability and energy efficiency of the entire machine are superior to those in the industry, enabling a 18% increase in efficiency and a 13% reduction in energy consumption;

●The entire machine is equipped with a 423 kWh lithium iron phosphate battery that supports dual-gun fast charging, with a maximum charging time of only 90 minutes when the battery is at 20% capacity; the battery thermal management system is intelligently controlled by BMS, assuring safety and reliability. Equipped with an LCD touchscreen, it displays real-time parameters of the entire machine;

●Standard with XCMG's self-developed third-generation load-sensitive pressure compensation technology for the variable displacement hydraulic system, it saves more than 5% energy compared to the second-generation technology; the pilot control lever integrates FNR shifting functions, providing convenient operation. The steering limit adopts both hydraulic flexibility and mechanical rigidity to reduce impact. With the intelligent temperature control independent dust collection system where the fan has reverse auto-cleaning function.

Main Technical Parameters

Parameters	XC978-EV
Operating Weight	25200kg
Rated Load	7800kg
Bucket Capacity	4.5m³
Dumping Height	3510mm
Overall Motor Power	410kW
Battery Capacity	423kW · h
Maximum Overall Dimensions (L*W*H)	9350x3230x3620mm



XC988-EV



Product Highlights

●XC988-EV is an 8.5-tonne pure electric loader with a standard battery capacity of 525 kWh, offering an endurance of over 8 hours; it is widely applicable for large-scale mining and port operations, among other working conditions;

●The entire machine adopts self-developed control technology, with key core technologies being independently controllable; it applies a dual-motor coupling walking drive technology without a transmission; with a rated power of up to 480 kW, it boasts powerful dynamics and leads the industry; both the maneuverability and energy efficiency of the entire machine are superior to those in the industry, enabling a 18% increase in efficiency and a 13% reduction in energy consumption;

●The entire machine is equipped with a 525 kWh lithium iron phosphate battery that supports dual-gun fast charging, with the shortest charging time being only 120 minutes (when paired with a 320 kW charging pile); the battery thermal management system is intelligently controlled by BMS, assuring safety and reliability; it is also equipped with a liquid crystal touch screen that displays various parameters of the entire machine in real-time;

●Standard with XCMG's self-developed third-generation load-sensitive pressure compensation technology for the variable displacement hydraulic system, it saves more than 5% energy compared to the second-generation technology; the pilot control lever integrates FNR shifting functions, providing convenient operation. The steering limit adopts both hydraulic flexibility and mechanical rigidity to reduce impact. With the intelligent temperature control independent cooling system where the fan has reverse auto-cleaning function.

Main Technical Parameters

Parameters	XC988-EV
Operating Weight	28640kg
Rated Load	8500kg
Bucket Capacity	4.5m³
Dumping Height	3510mm
Overall Motor Power	480kW
Battery Capacity	525kW · h
Maximum Overall Dimensions (L*W*H)	9285x3230x3670 mm

XC9108-EV

Product Highlights

●Currently, it is the largest tonne-class pure electric loader globally, with a rated load of 11 tonnes; being environmentally friendly and zero-emission, it is the ideal choice for large-scale mines, ports, and other users seeking pure electric equipment;

●The entire machine is equipped with a 700kWh lithium iron phosphate battery pack, providing an average endurance of 8 hours; it supports national standard four-gun super fast charging, with a charging time of less than 1 hour (from 20% to 100% SOC); the battery thermal management system is intelligently controlled by BMS, assuring safety and reliability. Adopting XCMG's patented "three-motor" technology, combined with self-developed electric control positive flow hydraulic technology and energy recovery functions, the machine's energy consumption is reduced by 70% compared to hydraulic transmission products, while work efficiency is increased by 20%;

●The all-new upgraded smart cabin features an electronic control operating system; the handle integrates FNR, one-button speed increase, and one-button material shaking functions; the 10.1-inch full LCD display screen allows for customizable parameter modes and function settings, making operation easier and the driving experience more comfortable;

●The entire machine can be equipped with high-dump work devices and different types of buckets ranging from 3.8 to 8.0 m□, meeting the needs of various working conditions.

Main Technical Parameters

参数 Parameters	XC9108-EV
Operating Weight	35000kg
Rated Load	11000kg
Bucket Capacity	6.2m³
Dumping Height	3250mm
Overall Motor Power	501kW
Battery Capacity	700kW · h
Maximum Overall Dimensions (L*W*H)	10200x3600x3770mm



XC9260-EV



Product Highlights

●XCMG is developing the largest electric loader by tonnage, with a working load capacity of up to 26 tonnes; with independently developed key technologies, it has become a leader in international large-tonnage loaders. It applies to large-scale opencast mining, mining truck loading and unloading, short-distance transportation, and other working conditions, making it the best choice for pairing with XCMG's 100-130 tonne mining trucks;

●XCMG's core technologies, including the "electro-hydraulic proportional intelligent control system + electronic control positive flow hydraulic system + load-sensing electronic control handle steering system," enable precise and efficient composite actions such as loading, traveling, and steering during operation;

●The pure electric ultra-high voltage drive system architecture boasts high transmission efficiency and fast response speed, with special functions such as anti-slip, limp-home, and automatic object detection. Hybrid power and energy recovery, effectively recovering the energy generated by "integrated electro-hydraulic brakes" and using it to wheel-side drive motors for minimal mechanical brake wear;

●The intelligent human-machine visual interaction system provides real-time, safe, convenient, and fast monitoring and diagnosis of the vehicle's operational information, equipped with a comprehensive safety protection system.

Main Technical Parameters

Parameters	XC9260-EV
Operating Weight	130000kg
Rated Load	26000kg
Bucket Capacity	11.5m³
Dumping Height	4726mm
Overall Motor Power	1540kW
Battery Capacity	1452.5kW · h
Maximum Overall Dimensions (L*W*H)	15784x5107x5537mm

DL1050-EV

Product Highlights

●XCMG is developing the largest electric wheel dozer by tonnage, with a blade capacity of up to 31m□; with independently developed key technologies, it has become a leader in international large-tonnage loaders. It applies to ground leveling, cleaning, and related bulldozing operations in large opencast mines, meeting the needs for complete equipment sets and zero-carbon emissions for large opencast mining equipment;

●XCMG's core technologies, including the "electro-hydraulic proportional intelligent control system + electronic control positive flow hydraulic system + load-sensing electronic control handle steering system," enable precise and efficient composite actions such as loading, traveling, and steering during operation;

●The pure electric ultra-high voltage drive system architecture boasts high transmission efficiency and rapid response speed, with special functions such as anti-slip, limp-home, and automatic timing. Hybrid power and energy recovery, effectively recovering the energy generated by "integrated electro-hydraulic brakes" and using it to wheel-side drive motors for minimal mechanical brake wear;

●The intelligent human-machine visual interaction system provides real-time, safe, convenient, and fast monitoring and diagnosis of the vehicle's operational information, equipped with a comprehensive safety protection system.

Main Technical Parameters

Parameters	DL1050-EV
Operating Weight	127500kg
Bucket Capacity	31m³
Dumping Height	1625mm
Overall Motor Power	1540kW
Battery Capacity	1452.5kW · h
Maximum Overall Dimensions (L*W*H)	14030x6256x5930mm



XC8-C2570EV



Product Highlights

●The lithium iron phosphate battery has an expected battery life of over 8 years and can undergo more than 4,000 charge-discharge cycles; the intelligent battery thermal management system monitors the battery's charging and discharging temperature, voltage, and current in real-time, optimizing battery performance and lifespan;

●The permanent magnet synchronous motor features low vibration and noise, high power density and torque density; the travel motor has a large starting torque, quick response, and smooth acceleration; the XCMG electric drive-specific transmission is specifically developed for electric excavators and loaders, with stable and reliable performance, including two-wheel drive and four-wheel drive switching, and high-speed automatic two-wheel drive functionality;

●XCMG's independently developed power intelligent matching optimization technology enables integrated intelligent control of the motor power, speed, torque, and other parameters of the entire vehicle; all control modules are easily accessible, and the display screen centrally displays information such as battery power, voltage, driving range, and motor speed, helping users easily monitor the vehicle's operating status;

●The quantitative load-sensing hydraulic system is energy-efficient and steering-priority, with electro-hydraulic proportional control for high operational accuracy, enabling easy realization of composite actions.

Main Technical Parameters

Parameters	XC8-C2570EV
Operating Weight	8400kg
Lifting Capacity at Max. Reach	3100kg
Shovel/Bucket Capacity	1/0.2m^3
Dumping Height	2770mm
Digging Depth	4440mm
Overall Motor Power	84.7kW
Battery Capacity	95.25kW · h
Maximum Overall Dimensions (L*W*H)	7340x2350x3437mm

XC8-S2570EV

Product Highlights

●The lithium iron phosphate battery has an expected battery life of over 8 years and can undergo more than 4,000 charge-discharge cycles; the intelligent battery thermal management system monitors the battery's charging and discharging temperature, voltage, and current in real-time, optimizing battery performance and lifespan;

●The permanent magnet synchronous motor features low vibration and noise, high power density and torque density; the travel motor has a large starting torque, quick response, and smooth acceleration; the XCMG electric drive-specific transmission is specifically developed for electric excavators and loaders, with stable and reliable performance, including two-wheel drive and four-wheel drive switching, and high-speed automatic two-wheel drive functionality;

●XCMG's independently developed power intelligent matching optimization technology enables integrated intelligent control of the motor power, speed, torque, and other parameters of the entire vehicle; all control modules are easily accessible, and the display screen centrally displays information such as battery power, voltage, driving range, and motor speed, helping users easily monitor the vehicle's operating status;

●The quantitative load-sensing hydraulic system is energy-efficient and steering-priority, with electro-hydraulic proportional control for high operational accuracy, enabling easy realization of composite actions; the side-shifting excavation end offers greater operational possibilities.

Main Technical Parameters

Parameters	XC8-S2570EV
Operating Weight	9500kg
Lifting Capacity at Max. Reach	3100kg
Shovel/Bucket Capacity	1/0.1-0.35m^3
Dumping Height	3364mm
Digging Depth (standard/with telescopic dipper)	4351/4408-5619 mm
Overall Motor Power	84.7kW
Battery Capacity	95.25kW · h
Maximum Overall Dimensions (L*W*H)	5915x2508x3682 mm



XC7-SR07EV



Product Highlights

●XCMG's first electric skid steer loader boasts powerful performance, rapid response, energy efficiency, and environmental friendliness, making it widely applicable to various working conditions such as earthmoving, municipal maintenance, landscaping, livestock farming, etc;

●The entire machine is equipped with a high-capacity lithium iron phosphate battery, which has high energy density, excellent safety performance, and long battery life; the BMS extends battery life; the dual travel motors paired with an integrated braking system assure safer and more reliable movement;

●The pump motor is equipped with a permanent magnet synchronous motor, which has strong overload capacity and good reliability. With the working hydraulic system based on electronic control, the machine is able to perform various operations efficiently and accurately. With proportional adjustment of auxiliary flow output as well as stepless adjustment function, the system can be operated at any flow rate constantly. Higher attachment flow output results in higher operating efficiency and better compatibility with various attachments;

Main Technical Parameters

Parameters	XC8-SR07E
Operating Weight	3150kg
Rated Load	910kg
Bucket Capacity	0.45m³
Dumping Height	2400mm
Overall Motor Power	32kW
Battery Capacity	35.3kW · h
Maximum Overall Dimensions (L*W*H)	3410x1800x1960 mm

2 Hybrid Wheel Loader

XC968-HEV

Product Highlights

●The 6-ton hybrid loader adopts a series oil-electric hybrid technology route, with a power architecture of "range extender + power battery"; it maintains XCMG's "three-motor" product advantage with a pure electric loader configuration;

●Through independently researched hybrid power matching and control technology, the integrated range extender and power battery are perfectly matched, significantly enhancing the machine's power and control performance; the fuel consumption of the hybrid loader is reduced by 30%-50% compared to diesel-powered loaders; the self-developed electric drive assembly adopts a high-speed motor solution for higher efficiency;

●The dual-pump converging quantitative hydraulic system and fully pilot-controlled steering and working devices assure precise and lightweight operation. Equipped with an FNR control lever, it allows for convenient gear shifting and features a one-button hydraulic motor speed increase function, enhancing the responsiveness and operational efficiency of the hydraulic system;

●The entire machine is equipped with a 49.55kWh lithium iron phosphate power battery with an instantaneous power output of up to 272kW, meeting the power demands of challenging and heavy-duty operating conditions. The entire machine comes with a charging port that supports single-gun fast charging; the battery thermal management system is intelligently controlled by the BMS, assuring safety and reliability.

Main Technical Parameters

Parameters	XC968-HEV
Operating Weight	18700kg
Rated Load	6000kg
Bucket Capacity	3.5m³
Dumping Height	3400mm
Emission Stage	China Stage Ⅳ
Rated Engine Power	128kW
Overall Motor Power	345kW · h
Maximum Overall Dimensions (L*W*H)	8755x3200x3455mm



XC975-HEV



Product Highlights

●The 7-ton hybrid loader adopts a series oil-electric hybrid technology route, with a power architecture of "range extender + power battery"; it maintains XCMG's "three-motor" product advantage with a pure electric loader configuration;

●Through independently researched hybrid power matching and control technology, the integrated range extender and power battery are perfectly matched, significantly enhancing the machine's power and control performance; the fuel consumption of the hybrid loader is reduced by 30%-50% compared to diesel-powered loaders; the self-developed electric drive assembly adopts a high-speed motor solution for higher efficiency;

●The dual-pump converging quantitative hydraulic system features full pilot control for steering and working devices, assuring precise and lightweight operation. Equipped with an FNR control lever, it allows for convenient gear shifting and features a one-button hydraulic motor speed increase function, enhancing the responsiveness and operational efficiency of the hydraulic system;

●The entire machine is equipped with a 58.73kWh lithium iron phosphate battery with an instantaneous power output of up to 350kW, meeting the power demands of challenging and heavy-duty operating conditions; it comes with a charging port that supports single-gun fast charging; the battery thermal management system is intelligently controlled by the BMS, assuring safety and reliability.

Main Technical Parameters

Parameters	XC975-HEV
Operating Weight	22620kg
Rated Load	7000kg
Bucket Capacity	4.5m³
Dumping Height	3415mm
Emission Stage	China IV
Rated Engine Power	129kW
Overall Motor Power	320kW · h
Maximum Overall Dimensions (L*W*H)	9180x3100x3575 mm

XC988-HEV

Product Highlights

●The 8-ton hybrid loader adopts a series oil-electric hybrid technology route, with a power architecture of "range extender + power battery"; it maintains XCMG's "three-motor" product advantage with a pure electric loader configuration;

●Through independently researched hybrid power matching and control technology, the integrated range extender and power battery are perfectly matched, significantly enhancing the machine's power and control performance; the fuel consumption of the hybrid loader is reduced by 30%-50% compared to diesel-powered loaders; the self-developed electric drive assembly adopts a high-speed motor solution for higher efficiency;

●Equipped with XCMG's self-made reinforced 9-ton drive axle and the third-generation fixed-variable hydraulic system with load-sensing pressure compensation technology, the entire machine boasts higher reliability, higher efficiency, and lower energy consumption.

●Equipped with a ROPS & FOPS cab, it assures the safety of the entire machine during operation; the cab is spacious, providing good operating visibility, and features a reasonable layout for convenient operation. The mechanical suspension seat, featuring anti-vibration performance, can be adjusted at different angles according to the comfort of the human body.

Main Technical Parameters

Parameters	XC988-HEV
Operating Weight	26000kg
Rated Load	8500kg
Bucket Capacity	4.5m³
Dumping Height	3510mm
Emission Stage	China IV
Rated Engine Power	150kW
Overall Motor Power	480kW · h
Maximum Overall Dimensions (L*W*H)	9285x3230x3670mm



3 Cable-Towed loader

XC958-EV



Product Highlights

●The XC958-EV cable-towed electric loader is a newly developed renewable energy product from XCMG Construction Machinery Co., Ltd; essentially, it is an innovative product powered by the electric grid, designed as a zero-emission electric loader that can meet the demand for continuous 24-hour operation.

●It replaces the engine with a combined motor and electric control system; the electric drive system is designed based on the characteristics of diesel engines and hydraulic couplings, integrating low-voltage power generation, air conditioning compressors, air compressors, and cooling fans.

●It uses a power supply system with suspended cables and neutral guy wires attached to towers. The asynchronous motor with low noise and high torque efficiently provides power to the entire machine; its multiple torque and current protection features assure robust power while adapting to various harsh operating conditions.

Main Technical Parameters

Parameters	XC958-EV
Operating Weight	17550±300kg(excluding the pole at the vehicle end)
Rated Load	5300kg
Bucket Capacity	2.5-5.0m³
Dumping Height	3420mm
Emission Stage	China IV
Overall Motor Power	200kW · h
Maximum Overall Dimensions (L*W*H)	8570x2996x3455（excluding the pole at the vehicle end）mm

4 Battery-swappable loader

XC968-EV

Product Highlights

●The 6-tonne pure electric loader, with a standard battery capacity of 282 kWh, has an endurance of more than 6 hours and is widely applicable to continuous operations in port warehousing, sand and gravel yards, railway freight yards, and other working conditions requiring such operations;

●The entire machine adopts self-developed control technology, with key core technologies being independently controllable; it applies a dual-motor coupling walking drive technology without a transmission; with a rated power of up to 270 kW, it boasts powerful dynamics and leads the industry; both the maneuverability and energy efficiency of the entire machine are superior to those in the industry, enabling a 18% increase in efficiency and a 13% reduction in energy consumption;

Main Technical Parameters

Parameters	XC968-EV
Operating Weight	18970/19430/20170kg
Rated Load	6000kg
Bucket Capacity	3.2/4.5m³
Dumping Height	3420mm
Overall Motor Power	270kW
Battery Capacity	282/350/423kW · h
Maximum Overall Dimensions (L*W*H)	8575/8985x2996x3455/3505mm



5 Hydrogen Wheel Loader

XC968-FCEV



Product Highlights

●Developed on the basis of XCMG's third-generation pure electric loader, it adopts well-known hydrogen fuel cells and high-rate batteries in the industry; the machine boasts a traction force of 170kN, a maximum breakout force of 174kN, and a combined time for bucket filling, lifting, and dumping of 9.7 seconds, demonstrating powerful and efficient performance;

●The entire machine can be hydrogen-filled in 5-10 minutes, providing a driving range of over 8 hours, which meets the work demands of a single shift; the matched 135kW hydrogen fuel cell stack ensures more efficient output when the machine operates at average power consumption;

●The dual-pump converging quantitative hydraulic system features full pilot control for steering and working devices, assuring precise and lightweight operation. Equipped with an FNR control lever, it allows for convenient gear shifting and features a one-button hydraulic motor speed increase function, enhancing the responsiveness and operational efficiency of the hydraulic system;

●The cab adopts micro-pressurization technology, featuring a spacious interior and excellent visibility; the high-performance shock-absorbing dual-rail seat, combined with a multi-directional adjustable steering column, can meet the usage requirements of different drivers; it provides you with a noise-reducing, dust-proof, and heat-insulating driving environment that is comfortable, healthy, and safe.

Main Technical Parameters

数 Parameters	FC968-FCEV
Operating Weight	19500kg
Rated Load	6000kg
Bucket Capacity	3.2m³
Dumping Height	3400mm
Hydrogen Fuel Cell Power	135kW
Hydrogen Tank Capacity	1050L
Battery Capacity	50kW · h














04 Skid Steer Loader



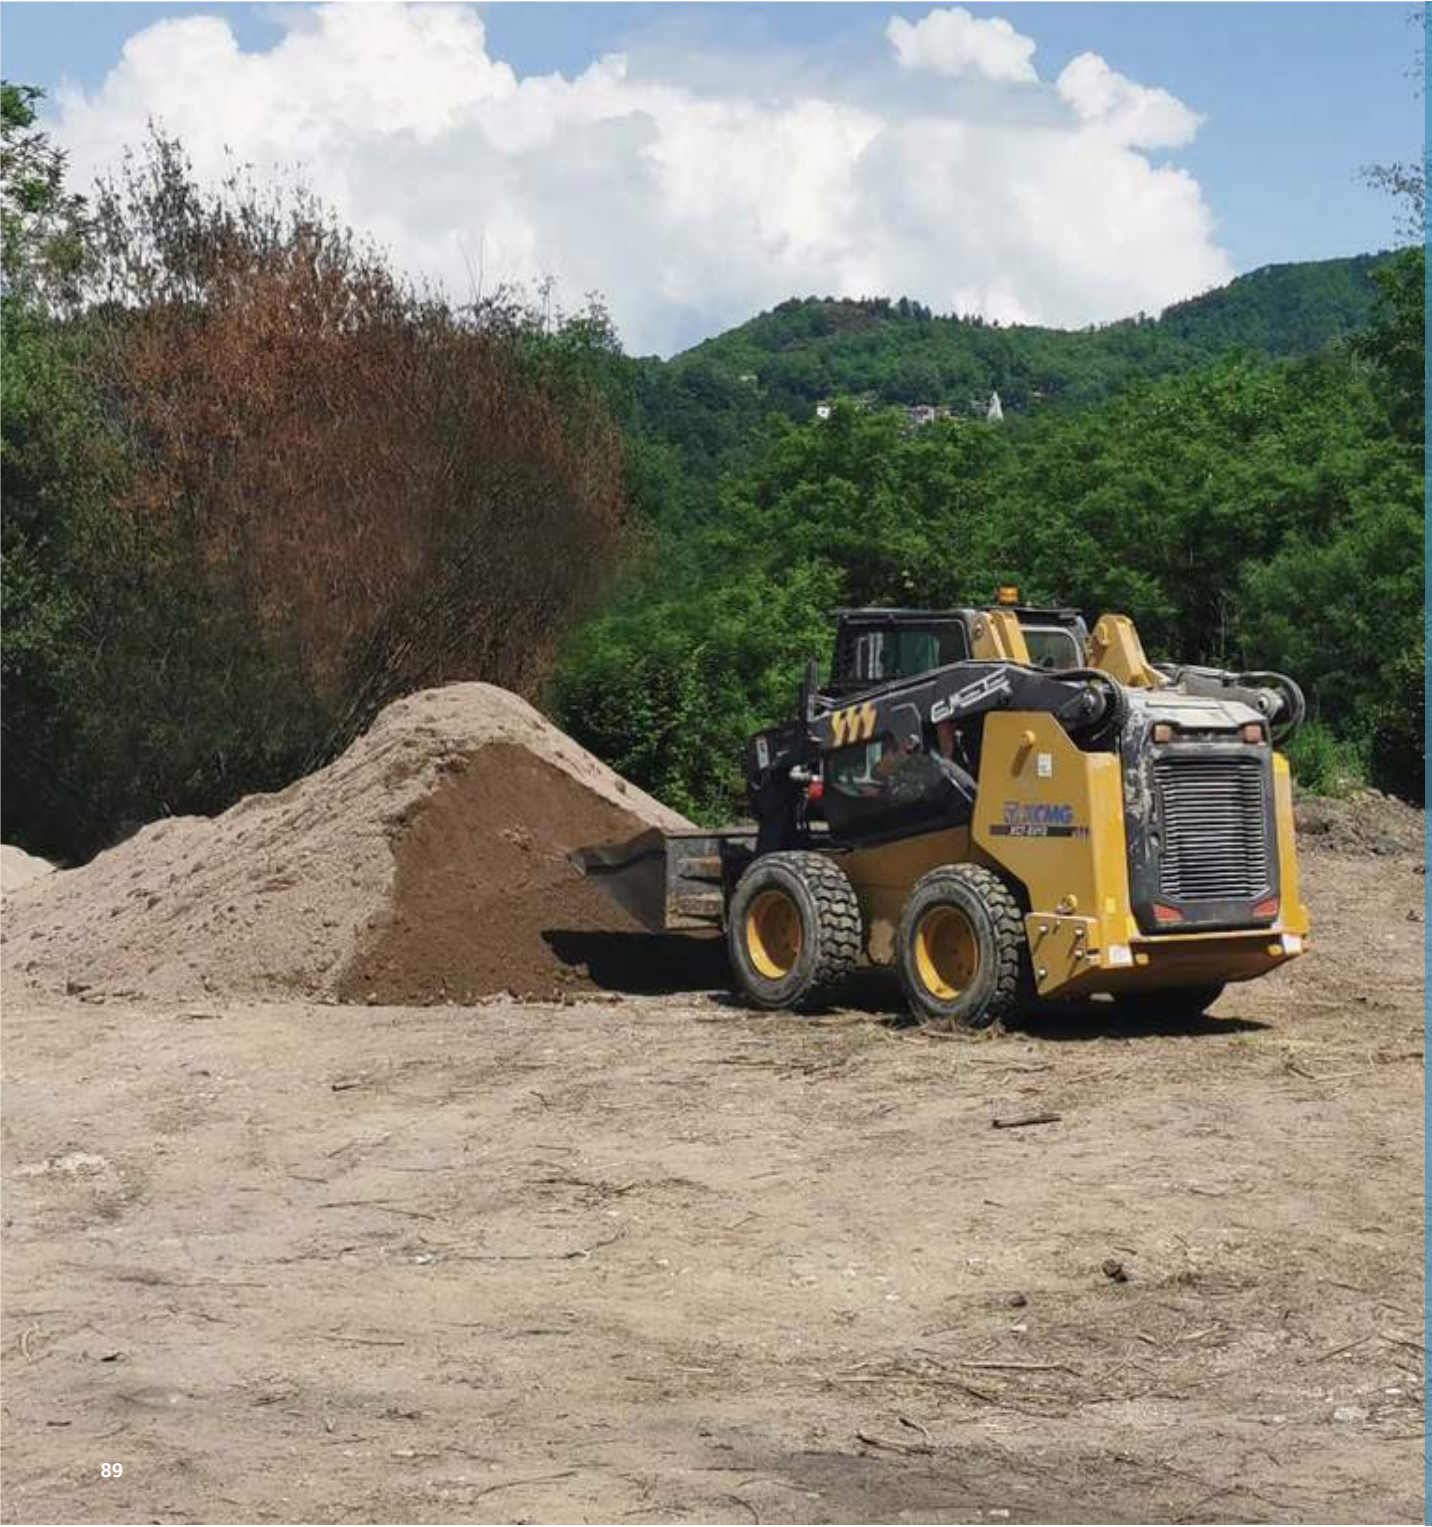

Skid Steer Loader

Skid Steer Loader

XC7-SR04
XC7-SR07
XC7-SR08
XC7-SR10
XC7-SR12
XC7-SV10
XC7-SV12

Compact Track Loader

XC7-TV10
XC7-TV12
XC7-TR08
MT04

1 Skid Steer Loader

XC7-SR04



Product Highlights

●Equipped with a Perkins engine, it features a longitudinal engine layout, direct-drive cooling, and four-point vibration damping;
Mechanical operation with error-proof design in the working system assures high safety;
The machine body is mini and compact, suitable for narrow working environments, and offers high flexibility;

●Auxiliary flow proportional control assures precise operation; the side sprocket boxes and modular wheel hub design provide good maintainability;
Multiple different working tools can be optionally equipped to meet the operational needs of various working conditions.

Main Technical Parameters

Parameters	XC7-SR04
Operating Weight	1550kg
Rated Load	385kg
Bucket Capacity	0.17m³
Dumping Height	1887mm
Emission Stage	China Stage IV
Rated Engine Power	18.4kW
Maximum Overall Dimensions (L*W*H)	2545x914x1854mm

XC7-SR07

Product Highlights

●Equipped with a high-performance engine, the machine's power performance is optimized, providing strong power and low fuel consumption; the power is adaptively allocated to prevent stalling, allowing for more efficient power performance;
Closed hydrostatic transmission with stepless speed regulation provides strong driving force; electric proportional auxiliary flow control enables more precise manipulation;
●Multiple different working attachments such as a four-in-one bucket, angle broom, enclosed broom, snow plow, and auger can be optionally equipped to meet the operational needs of various working conditions.

●The integrated maintenance-free sprocket box, reinforced chains, and high-strength roller bearings assure safer and more reliable movement;
●Standard features include centralized pressure measurement and detection, compartmentalized maintenance space design in the engine compartment, a ROPS & FOPS cab that is safe, comfortable, and easy to operate, and an intelligent control system equipped with VCU for more convenient troubleshooting and maintenance;

Main Technical Parameters

Parameters	XC7-SR07		
Operating Weight	2950kg		
Rated Load	890kg		
Bucket Capacity	0.45m³		
Dumping Height	2400mm		
Emission Stage	China III		
Rated Engine Power	36.8kW	36.5kW	35.5kW
Maximum Overall Dimensions (L*W*H)	3410x1800x1960mm		



XC7-SR08



Product Highlights

●Equipped with a high-performance engine, the machine's power performance is optimized, providing strong power and low fuel consumption; the power is adaptively allocated to prevent stalling, allowing for more efficient power performance;

●Closed hydrostatic transmission with stepless speed regulation provides strong driving force; electric proportional auxiliary flow control enables more precise manipulation;

Standard quick-change interfaces and integrated self-unloading pressure combination quick-change couplers enable higher attachment operation efficiency and easier attachment changes.

●The OROPS & FOPS cab adopts a high-strength narrow pillar design for structural safety and better visibility; it is equipped with a mechanically suspended seat, heating and cooling air conditioning, and glass defrosting function, providing a better driving and riding experience;

●Multiple different working attachments such as a four-in-one bucket, angle broom, enclosed broom, snow plow, continuous trencher, auger, etc. can be optionally equipped to meet the operational needs of various working conditions.

Main Technical Parameters

Parameters	XC7-SR08		
Operating Weight	3210kg		
Rated Load	955kg		
Bucket Capacity	0.45m³		
Dumping Height	2400mm		
Emission Stage	China III		
Rated Engine Power	55.8kW	50.2kW	49.9kW
Maximum Overall Dimensions (L*W*H)	3410x1800x1960mm		

XC7-SR10

Product Highlights

●Equipped with a high-performance engine, the machine's power performance is optimized, providing strong power and low fuel consumption; the power is adaptively allocated to prevent stalling, allowing for more efficient power performance;

●Closed hydrostatic transmission with stepless speed regulation provides strong driving force; electric proportional auxiliary flow control enables more precise manipulation;

●The operating unit is designed with lightweight structure; the lifting arm features higher load capacity; and all hinged pins are made high-strength materials to improve the service life of structural parts;

●The interior of the OROPS & FOPS cab is spacious, with good operating visibility and a reasonable layout for convenient operation; the entire cab can be tilted backwards at a large angle, and the upper rear cover can be fully opened, allowing for one-stop maintenance of all major maintenance components;

●Optional working attachments such as a four-in-one bucket, angle broom, enclosed broom, snow thrower, milling cutter, snow plow, continuous trencher, auger, etc. can be equipped to meet the operational needs of various working conditions.

Main Technical Parameters

Parameters	XC7-SR10		
Operating Weight	3550kg		
Rated Load	1100kg		
Bucket Capacity	0.6m³		
Dumping Height	2530mm		
Emission Stage	China III		
Rated Engine Power	61.3kW		66kW
Maximum Overall Dimensions (L*W*H)	3760x2000x2040mm		



XC7-SV10



Product Highlights

●Equipped with a high-performance engine, the machine's power performance is optimized, providing strong power and low fuel consumption; the power is adaptively allocated to prevent stalling, and the independent cooling system enables more efficient power performance;

●Closed hydrostatic transmission with stepless speed regulation offers strong driving force and intelligent electro-hydraulic proportional control; users can customize parameters through the instrument panel according to their operating habits for more precise manipulation;

●Multiple steering and operating modes, with ISO/H dual-mode free switching, meet the needs of different working conditions; the vertical lifting method provides stronger heavy-load capacity. Greater unloading distance;

●The interior of the ROPS & FOPS cab is spacious, with good operating visibility and a reasonable layout for convenient operation; the entire cab can be tilted backwards at a large angle, and the upper rear cover can be fully opened, allowing for one-stop maintenance of all major maintenance components;

Optional working attachments such as a four-in-one bucket, angle broom, enclosed broom, snow thrower, milling cutter, snow plow, continuous trencher, auger, etc. can be equipped to meet the operational needs of various working conditions.

Main Technical Parameters

Parameters	XC7-SV10
Operating Weight	4000kg
Rated Load	1260kg
Bucket Capacity	0.6m³
Dumping Height	2326mm
Emission Stage	U.S. EPA Tier 4 Final/EU Stage V
Rated Engine Power	53.7kW
Maximum Overall Dimensions (L*W*H)	3884x2000x2040mm

XC7-SR12

Product Highlights

●Equipped with a high-performance engine, the machine's power performance is optimized, providing strong power and low fuel consumption; the power is adaptively allocated to prevent stalling, allowing for more efficient power performance;

●Closed hydrostatic transmission with stepless speed regulation offers strong driving force; the standard dual-speed design for traveling enhances transfer efficiency; electric proportional auxiliary flow control enables more precise manipulation;

●The interior of the ROPS & FOPS cab is spacious, with good operating visibility and a reasonable layout for convenient operation; the entire cab can be tilted backwards at a large angle, and the upper rear cover can be fully opened, allowing for one-stop maintenance of all major maintenance components;

●Standard counterweight design allows for higher rated loading capacity; the lubricating oil ports at various hinge positions of the working device are optimally designed, providing superior maintenance performance for the entire machine. The main wear parts of the bucket are made of high-strength wear-resistant plates to ensure reliable structure;

●Optional working attachments such as a four-in-one bucket, angle broom, enclosed broom, snow thrower, milling cutter, snow plow, continuous trencher, auger, etc. can be equipped to meet the operational needs of various working conditions.

Main Technical Parameters

Parameters	XC7-SR12	
Operating Weight	3680kg	
Rated Load	1260kg	
Bucket Capacity	0.6m³	
Dumping Height	2530mm	
Emission Stage	China III	
Rated Engine Power	61.3kW	73.5kW
Maximum Overall Dimensions (L*W*H)	3760x2000x2040mm	



XC7-SV12



Product Highlights

●Equipped with a high-performance engine, the machine's power performance is optimized, providing strong power and low fuel consumption; the power is adaptively allocated to prevent stalling, and the independent cooling system enables more efficient power performance;

●Closed hydrostatic transmission features stepless speed regulation and strong driving force; the standard dual-speed design for traveling enhances transfer efficiency; with intelligent electro-hydraulic proportional control, users can customize parameters through the instrument panel according to their operating habits for more precise manipulation;

Multiple steering and speed modes with free switching between ISO/H dual modes offer higher auxiliary flow output, making tool operation more efficient; the vertical lifting method provides stronger heavy-load capacity. Greater unloading distance;

●The ROPS & FOPS cab boasts a spacious interior, excellent operating visibility, and improved sealing; the layout is rational and easy to operate; the entire cab can be tilted backwards at a large angle, and the upper rear cover can be fully opened, allowing for one-stop maintenance of all major maintenance components;

Optional working attachments such as a four-in-one bucket, angle broom, enclosed broom, snow thrower, milling cutter, snow plow, continuous trencher, auger, etc. can be equipped to meet the operational needs of various working conditions.

Main Technical Parameters

Parameters	XC7-SV12	
Operating Weight	4000kg	
Rated Load	1360kg	
Bucket Capacity	0.6m³	
Dumping Height	2520mm	
Emission Stage	U.S. EPA Tier 4 Final	EU Stage V
Rated Engine Power	53.7kW	
Maximum Overall Dimensions (L*W*H)	3800x2000x2040mm	

2 Compact Track Loader

XC7-TR08

Product Highlights

●Equipped with a high-performance engine, the machine's power performance is optimized, providing strong power and low fuel consumption; the power is adaptively allocated to prevent stalling, resulting in more efficient power performance; it excels in stacking and climbing abilities;

●Closed hydrostatic transmission features stepless speed regulation and strong driving force, enhancing transfer efficiency; electric proportional auxiliary flow control allows users to customize parameters through the instrument panel according to their operating habits for more precise manipulation; it comes standard with a high flow rate, with a maximum flow rate of 120L/min, which is 10% higher than competitors;

●The crawler-type traveling method offers better passage performance and adapts to complex working conditions; it uses high-strength, high-abrasion-resistant rubber tracks for higher reliability; the transmission wheel system adopts a welded structure with forged semi-bodies, providing high strength and good abrasion resistance;

●The interior of the OROPS & FOPS cab is spacious, with excellent operating visibility and improved sealing; it is equipped with an efficient heating and cooling air conditioning system with 8 air vents for enhanced comfort; multiple steering and speed modes are available, with free switching between ISO/H dual modes; the entire cab can be tilted backwards at a large angle, and the upper rear cover can be fully opened, allowing for one-stop maintenance of all major maintenance components;

Main Technical Parameters

Parameters	XC7-TR08	
Operating Weight	4100kg	
Rated Load	955kg	
Bucket Capacity	0.45m³	
Dumping Height	2454mm	
Emission Stage	U.S. EPA Tier 4 Final	EU Stage V
Rated Engine Power	49.9kW	
Maximum Overall Dimensions (L*W*H)	3520x1800x2053mm	



XC7-TV10



Product Highlights

●Equipped with a high-performance engine, the machine's power performance is optimized, providing strong power and low fuel consumption; the power is adaptively allocated to prevent stalling, resulting in more efficient power performance; it excels in stacking and climbing abilities;

●With the working hydraulic system based on intelligent electro-hydraulic proportional control, the machine is able to perform various operations efficiently and accurately. The hydraulic system for working operations has been optimized to achieve composite movements of boom lifting and bucket tilting, assuring automatic leveling of the lifting arm and featuring a function to lower the boom when the engine is shut off;

●The crawler-type traveling method offers better passage performance and adapts to complex working conditions; it uses high-strength, high-abrasion-resistant rubber tracks for higher reliability; the transmission wheel system adopts a welded structure with forged semi-bodies, providing high strength and good abrasion resistance;

●The interior of the ROPS & FOPS cab is spacious, with excellent operating visibility and improved sealing; it is equipped with an efficient heating and cooling air conditioning system with 8 air vents for enhanced comfort; multiple steering and speed modes are available, with free switching between ISO/H dual modes; the entire cab can be tilted backwards at a large angle, and the upper rear cover can be fully opened, allowing for one-stop maintenance of all major maintenance components.

Main Technical Parameters

Parameters	XC7-TV10	
Operating Weight	4750kg	
Rated Load	1100kg	
Bucket Capacity	0.6m³	
Dumping Height	2461mm	
Emission Stage	U.S. EPA Tier 4 Final	Euro-V
Rated Engine Power	53.7kW	
Maximum Overall Dimensions (L*W*H)	3851x2000x2088mm	

XC7-TV12

Product Highlights

●Equipped with a high-performance engine, the machine's power performance is optimized, providing strong power and low fuel consumption; in addition, emissions meet the requirements of both the U.S. Tier 4 Final and Euro V emission standards, satisfying more stringent environmental protection regulations. The power adaptive distribution anti-stall function enables more efficient power performance, with excellent stacking and climbing abilities;

●The core components of the hydraulic system utilize reliable travel hydraulic pumps and travel motors; the control method for the working hydraulic system adopts a pilot control system, resulting in sensitive and accurate responses for all operations of the entire machine. The hydraulic system features a function to lower the boom when the engine is shut off;

●The crawler-type traveling method offers better passage performance and adapts to complex working conditions; it uses high-strength, high-abrasion-resistant rubber tracks for higher reliability; the transmission wheel system adopts a welded structure with forged semi-bodies, providing high strength and good abrasion resistance;

●The ROPS & FOPS cab boasts a spacious interior with excellent operating visibility and improved sealing; the layout is rational and easy to operate, offering multiple steering and speed modes with free switching between ISO/H dual modes;

●Optional working attachments such as a four-in-one bucket, angle broom, enclosed broom, snow thrower, milling cutter, snow plow, continuous trencher, auger, etc. can be equipped to meet the operational needs of various working conditions.

Main Technical Parameters

Parameters	XC7-TV12	
Operating Weight	5150kg	
Rated Load	1360kg	
Bucket Capacity	0.6m³	
Dumping Height	2615mm	
Emission Stage	U.S. EPA Tier 4 Final	Euro-V
Rated Engine Power	53.7kW	
Maximum Overall Dimensions (L*W*H)	3786x2130x2100mm	



MT04



Product Highlights

●The high-performance and multi-purpose mini loader is equipped with various attachments to achieve multiple tasks such as trenching, clamping, sweeping, mowing, crushing, etc;
Its compact body allows for flexible operation, and the standing operating mode provides a broader field of view; the integrated driving platform enables you to see the sides of the machine, the edge of the bucket, or the attachments;

●It is easy to use and operate, making it highly suitable for operators with less experience;
It adopts a low-impact wide crawler design to minimize damage to lawns or landscapes.

Main Technical Parameters

Parameters	MT04
Operating Weight	1550kg
Rated Load	400kg
Bucket Capacity	0.17m³
Dumping Height	1400mm
Emission Stage	U.S. EPA Tier 4 Final
Rated Engine Power	18.2kW
Maximum Overall Dimensions (L*W*H)	2895x914x400mm















05

Backhoe Loader





Backhoe Loader

Backhoe Loader

XC8-S0750
XC8-S2570
XC8-S3570
XC8-S3580
XC8-C2560
XC8-C2570
XC8-S2570eco
WZ30-25

XC8-S0750



Product Highlights

●Multiple internationally renowned engine brands can be selected, covering different emission stages; they offer good power performance, large torque reserve, low fuel consumption, low noise, and low emissions; the entire machine can meet the environmental protection requirements of different regions;

●Electro-hydraulic proportional control enables high precision in operation and can easily achieve composite movements, resulting in high work efficiency; the operating mode of the excavation end allows for easy switching between SAE and ISO operating modes, accommodating different operators' habits;

●The ROPS & FOPS cab meets safety standards, ensuring the safety of the entire machine during operation; it offers excellent internal operating visibility; designed based on ergonomic principles, all instruments are located in easily observable positions, and all button switches are within easy reach, making operation convenient and safe; the air conditioning vents are optimally arranged to provide a comfortable operating environment;

●Optional attachments such as a six-in-one bucket, enclosed broom, forks, auger, breaker hammer, ripper, and other various working tools can be equipped to meet the operational needs of different working conditions.

Main Technical Parameters

Parameters	XC8-S0750
Operating Weight	3800kg
Lifting Capacity at Max. Reach	2000kg
Shovel/Bucket Capacity	0.36/0.06m³
Dumping Height	2220mm
Digging Depth	2755mm
Emission Stage	China III
Rated Engine Power	36.8kW
Maximum Overall Dimensions (L*W*H)	3760x1612x2300mm

XC8-S2570

Product Highlights

●Multiple renowned engine brands can be selected, covering different emission stages; they offer excellent power performance, large torque reserve, low fuel consumption, low noise, and low emissions, meeting the environmental protection requirements of different regions;

●XCMG has independently developed a dedicated heavy-duty, wet brake drive axle for backhoe loaders, which offers stronger carrying capacity; it features a fully single-clutch layout, external independent cartridge valve integrated control technology, and electronically controlled power shift and direction change with four gears in front and three in rear for more reliable performance; high-speed automatic switching between two-wheel drive and four-wheel drive provides safer driving;

●Optional fixed displacement pump system or variable displacement pump hydraulic system is available. The fixed displacement pump system is equipped with controllable dual-pump confluence technology, allowing users to select either single-pump or dual-pump operating modes based on working conditions, thereby improving work efficiency and reducing fuel consumption. The variable displacement pump hydraulic system is equipped with a flow-sharing load-sensing multi-way valve, which offers excellent composite action performance and is energy-saving and efficient. Optional pilot control or electro-hydraulic proportional control provides excellent operational comfort; the control methods cover ISO and SAE standards, making it easier to learn and more convenient to operate;

Main Technical Parameters

Parameters	XC8-S2570		
Operating Weight	8600kg		
Lifting Capacity at Max. Reach	3098kg		
Shovel/Bucket Capacity	1/0.1-0.35m³		
Dumping Height	2827mm		
Digging Depth (standard/with telescopic dipper)	4315/4595mm		
Emission Stage	China II	China III	Euro-V
Rated Engine Power	70kW	73.5kW	74kW
Maximum Overall Dimensions (L*W*H)	5915x2350x3682mm		



XC8-S3570



Product Highlights

●Equipped with a high-performance engine, the overall power performance of the machine is optimized, featuring strong power, low fuel consumption, and large torque reserve, resulting in more efficient power performance.

●XCMG has independently developed a dedicated heavy-duty, wet brake steering drive axle for backhoe loaders, which offers stronger carrying capacity; it features a mixed clutch layout and electronically controlled power shift and direction change with four gears in front and four in rear for more reliable performance; high-speed automatic switching between two-wheel drive and four-wheel drive provides safer driving;

●The auxiliary functions feature both continuous and non-continuous oil supply modes; additionally, it allows for the selection of either unilateral or bilateral oil supply modes, satisfying the different needs of various attachments.

●More comfortable and high-end: a cab with an ultra-wide field of view, ample legroom, and intelligent high-power heating and cooling air conditioning provide a luxurious driving experience;

Multi-purpose machine: it can be equipped with attachments such as multi-functional buckets, snow plows, forks, breakers, etc., to meet various work requirements.

Main Technical Parameters

Parameters	XC8-S3570
Operating Weight	9750kg
Lifting Capacity at Max. Reach	4632kg
Shovel/Bucket Capacity	1.3/0.1-0.35m^3
Dumping Height	2763mm
Digging Depth (standard/with telescopic dipper)	4353/6666mm
Emission Stage	China III
Rated Engine Power	73.5kW
Maximum Overall Dimensions (L*W*H)	6137x2587x3716mm

XC8-S3580

Product Highlights

●The Perkins engine, which is mainstream in the European and American markets, offers excellent power performance, large torque reserve, and low fuel consumption.

●The variable displacement pump load-sensing hydraulic system is energy-saving and efficient; it can be operated via electric control or pilot joystick for smooth and comfortable maneuvering; the excavation mode can be switched between ISO and SAE with one button to meet different customer needs; optional driving stability modules provide safe and comfortable high-speed driving, with multiple steering modes to adapt to various working environments.

●The eight-link loading mechanism with automatic leveling assures minimal angle variation within 1.5° during lifting, providing excellent translational stability; with high scooping and lifting forces, it boasts strong loading capacity and is capable of handling various harsh loading conditions; its superior digging force ensures outstanding work capabilities.

●The ultra-large turning angle one-piece rear-tilting hood is more lightweight and facilitates one-stop maintenance and convenient servicing; together with a more compact working mechanism, it provides a better operating view.

Main Technical Parameters

Parameters	XC8-S3580	
Operating Weight	9750kg	
Lifting Capacity at Max. Reach	4632kg	
Shovel/Bucket Capacity	1.3/0.1-0.35m^3	
Dumping Height	2763mm	
Digging Depth (standard/with telescopic dipper)	4353/5555mm	
Emission Stage	China III	EU Stage V
Rated Engine Power	73.5kW	82kW
Maximum Overall Dimensions (L*W*H)	6137x2587x3716mm	



XC8-C2560



Product Highlights

●Equipped with a high-performance engine, the overall power performance of the machine is optimized, featuring strong power, low fuel consumption, and large torque reserve, resulting in more efficient power performance;

●XCMG has independently developed a dedicated heavy-duty, wet brake drive axle for backhoe loaders, which offers stronger carrying capacity and features electronically controlled shifting and direction change for easy and convenient operation; it has two-wheel drive and four-wheel drive switching functions, as well as a four-speed automatic two-wheel drive mode, providing high safety and economy.

●Through optimal design, it boasts a lightweight structure with high strength; with a lifting force of 66kN, it performs exceptionally well among similar products; Equipped with a ROPS & FOPS cab, it assures the safety of the entire machine during operation; the internal operating visibility is excellent; the cab is designed according to ergonomic principles, with all instruments located in easily observable positions and all button switches within easy reach for convenient and safe operation; the air conditioning vents are optimally arranged to provide a comfortable operating environment.

Main Technical Parameters

Parameters	XC8-C2560
Operating Weight	7600kg
Lifting Capacity at Max. Reach	3161kg
Shovel/Bucket Capacity	1/0.1-0.35m³
Dumping Height	2776mm
Digging Depth (standard/with telescopic dipper)	4440/5698mm
Emission Stage	U.S. EPA Tier 4 Final
Rated Engine Power	54kW
Maximum Overall Dimensions (L*W*H)	7340x2350x3437mm

XC8-C2570

Product Highlights

●Multiple internationally renowned engine brands can be selected, covering different emission stages; they offer good power performance, large torque reserve, low fuel consumption, low noise, and low emissions; the entire machine can meet the environmental protection requirements of different regions;

●XCMG has independently developed a dedicated heavy-duty, wet brake drive axle for backhoe loaders, which offers stronger carrying capacity and features electronically controlled shifting and direction change for easy and convenient operation; it has two-wheel drive and four-wheel drive switching functions, as well as a four-speed automatic two-wheel drive mode, providing high safety and economy;

●Utilizing an eight-link loading mechanism with optimally designed structure and hinge points, it boasts a lightweight yet strong construction; with a lifting force of 66kN, it stands out among similar products;

Multi-purpose machine: it can be equipped with attachments such as multi-functional buckets, snow plows, forks, breakers, etc., to meet various work requirements.

Main Technical Parameters

Parameters	XC8-C2570		
Operating Weight	7600kg		
Lifting Capacity at Max. Reach	3098kg		
Shovel/Bucket Capacity	1/0.1-0.35m³		
Dumping Height	2800mm		
Digging Depth (standard/with telescopic dipper)	4440/5698mm		
Emission Stage	China II	China III	U.S. EPA Tier 4 Final
Rated Engine Power	70kW	73.5kW	74.5kW
Maximum Overall Dimensions (L*W*H)	7340x2550x3437mm		



XC8-S2570eco



Product Highlights

●The engine is powerful with high torque reserve, fuel-efficient, low in fuel consumption, and strong in power; it is equipped with a mechanical shift gearbox, which is stable in performance; the gear setting is 4F+4R, making the machine easy and simple to operate; with the function of two-wheel drive/four-wheel drive switching, it is economical, safe, and cost-effective.

●The loading end is lightweight but high in strength; the bucket angle changes little during lifting, assuring good translational movement; it features an automatic leveling function, resulting in high work efficiency; the digging end adopts a straight-arm design with a 180° slewing angle, providing excellent digging depth and a large digging radius, which results in a wide digging range, and various buckets such as V-buckets, dredging buckets, and wide buckets can be selected.

●The quantitative open hydraulic system is energy-saving and efficient; steering priority assures safe operation and driving; mechanical control is simple and results in high work efficiency; the operating mode of the digging end adopts the SAE operating mode, and the ISO operating mode is optionally available to accommodate different market operating habits.

●The ROPS&FOPS cab offers excellent visibility for internal operations: it conforms to ergonomic principles, with all instruments, button switches positioned for easy observation and convenient, safe operation; the air conditioning vents are optimally arranged to provide a comfortable operating environment.

Main Technical Parameters

参数 Parameters	XC8-S2570ECO
Operating Weight	8000kg
Lifting Capacity at Max. Reach	3098kg
Shovel/Bucket Capacity	1.0/0.2m^3
Dumping Height	2800mm
Digging Depth (standard/with telescopic dipper)	4346/5614mm
Emission Stage	China II
Rated Engine Power	70kW
Maximum Overall Dimensions (L*W*H)	6130x2550x3510mm

WZ30-25

Product Highlights

●The engine is powerful with high torque reserve, good economy, and low fuel consumption; it delivers strong power and is a high-quality product specially designed and verified for the operating conditions of multi-functional loaders.

●It adopts a transmission and drive axle specifically designed for construction machinery, which is stable in quality, reliable in performance, and convenient for maintenance.

●The digging end adopts a load-sensing hydraulic system with pilot control, providing comfortable operation and reducing the difficulty and intensity of the driver's work.

●Optimized operating tools designed with Z-type reverse six-linkage structure integrated with single rocker arm, short tie rod and horizontal boom cylinder, featuring superior operating performance and efficiency. It features an automatic leveling function for the bucket at any position, eliminating the need for adjustment of the bucket state during subsequent loading, simplifying the operator's work, and improving work efficiency.

Main Technical Parameters

Parameters	WZ30-25
Operating Weight	9800kg
Lifting Capacity at Max. Reach	2800kg
Shovel/Bucket Capacity	1/0.3m^3
Dumping Height	2650mm
Digging Depth (standard/with telescopic dipper)	4400mm
Emission Stage	China II
Rated Engine Power	65kW
Maximum Overall Dimensions (L*W*H)	8000x2310x3450mm




XCMG






XCMG



06 Specialized Products





Specialized Products

Stone Fork Wheel Loader

LW500KV-T18
LW600KN-T25
LW700KV-T33
XC998

Side Dump Wheel Loader

XC958
XC968

Underground Loader

LW200KV
ZL20E(S)
ZL30E
ZL50E

Wheel Dozer

DL210KN
DL350
DL560

Clamp Wheel Loader

XC958
XC968

Grass Grab Loader

XC938
XC958

Skidder

XC360

Tire Grabber

LW1200KN

1 石材叉装载机

Stone Fork
Wheel Loader

LW500KV-T18



Product Highlights

●The LW500KV-T18 Stone Forklift Loader is a flagship product of a new generation launched by XCMG (Xuzhou Construction Machinery Group). The entire machine is based on XCMG's well-tested and renowned LW500K loader product platform; besides inheriting the advantages of XCMG's K-series loaders, it has been comprehensively upgraded to meet the specific requirements of stone forklifting operations;

●Equipped with an air-to-air intercooled, electronically controlled high-pressure common rail energy-saving high-performance engine, it has a rated power of 170kW. Equipped with a desert air filter with three-stage filtration, it can adapt to dusty working conditions; it features high reliability, high adaptability, low fuel consumption, and low emissions, meeting China's III emission standards; the engine has three working modes to meet the needs of different working conditions;

●The pilot-operated hydraulic system allows for easy and smooth operation, reducing work intensity. The steering hydraulic system adopts a single-stable valve structure that is more suitable for the ultra-heavy-load operating conditions of stone forklift loaders, improving steering stability and reliability. The steering hydraulic system and the working hydraulic system are independent of each other;

●The new international version of the fully enclosed, slightly pressurized, and heated/cooled air-conditioned cab is spacious inside with a wide field of view; the high-performance shock-absorbing seat, combined with a multi-directional adjustable steering column, can meet the requirements of different drivers; the all-new digital combined instrument panel has fault diagnosis and alarm functions, with the control levers within easy reach, making the entire machine comfortable and convenient to operate.

Main Technical Parameters

Parameters	LW500KV-T18	
Operating Weight	21000kg	
Rated Load	18000kg	14000kg
Tipping Load (straight)	20000kg	
Lifting Capacity at Max. Reach	1500mm	3050mm
Emission Stage	China III	
Rated Engine Power	170kW	
Maximum Overall Dimensions (L*W*H)	8380x2950x3515mm	

LW600KN-T25

Product Highlights

●The LW600KV-T25 Stone Forklift Loader is a flagship product of a new generation launched by XCMG (Xuzhou Construction Machinery Group). The entire machine is based on XCMG's well-tested and renowned LW600K loader product platform; besides inheriting the advantages of XCMG's K-series loaders, it has been comprehensively upgraded to meet the specific requirements of stone forklifting operations;

●The air-to-air intercooled and electronically controlled high-pressure common rail energy-saving high-performance engine is powerful with large power reserve and convenient and reliable operation. It adopts an omnidirectional elastic suspension and a parallel-axis power shift transmission with electro-hydraulic control, featuring an automatic gear shift switch (KD function) for smooth gear changes;

●The working hydraulic system and steering hydraulic system use a dual-pump split-combine flow design, which enhances pump reliability and reduces hydraulic system heat generation and engine load, contributing to energy savings; the working hydraulic system employs pilot technology, making operation convenient and natural, which significantly reduces the driver's workload.

●The integrated new-type cab is equipped with UV-resistant tempered glass, providing a wide field of view and spacious interior space; it is sealed and shock-absorbent; the engine hood adopts a large side door and a flip-up design with a wide opening angle, making it convenient for inspecting and repairing the engine and radiator, and making maintenance easy and simple.

Main Technical Parameters

Parameters	LW600KN-T25	
Operating Weight	28500kg	
Rated Load	25000kg	
Tipping Load (straight)	25000kg	
Lifting Capacity at Max. Reach	15000mm	3200mm
Height to hinge pin, fully raised	3535mm	
Emission Stage	China II	
Rated Engine Power	178kW	
Maximum Overall Dimensions (L*W*H)	8740x3255x3585mm	



LW700KV-T33



Product Highlights

●The LW700KV-T33 Stone Forklift Loader is a flagship product of a new generation launched by XCMG (Xuzhou Construction Machinery Group). The entire machine is based on XCMG's well-tested and renowned LW700K loader product platform; besides inheriting the advantages of XCMG's K-series loaders, it has been comprehensively upgraded to meet the specific requirements of stone forklifting operations;

●The air-to-air intercooled and electronically controlled high-pressure common rail energy-saving high-performance engine has a rated power of 178kW. Equipped with a desert air filter with three-stage filtration, it can adapt to dusty working conditions; it features high reliability, high adaptability, low fuel consumption, and low emissions; the energy-saving planetary hydraulic transmission adopts a large-capacity, energy-saving dual-turbine torque converter and a reinforced gearbox, achieving perfect matching with the engine;

●The pilot-operated hydraulic system allows for easy and smooth operation, reducing work intensity. The steering hydraulic system adopts a single-stable valve structure that is more suitable for the ultra-heavy-load operating conditions of stone forklift loaders, improving steering stability and reliability. The steering hydraulic system and the working hydraulic system are independent of each other;

●All maintenance points for oil level inspection, fuel, oil and grease filling, etc., are easily accessible, and the maintenance and replacement of air filter elements and electrical equipment can be carried out conveniently.

Main Technical Parameters

Parameters	LW700KV-T33	
Operating Weight	38500kg	
Rated Load	33000kg	26000kg
Tipping Load (straight)	33000kg	
Lifting Capacity at Max. Reach	1800mm	3600mm
Height to hinge pin, fully raised	3880mm	
Emission Stage	China Stage III	
Rated Engine Power	178kW	
Maximum Overall Dimensions (L*W*H)	9310x3275x3650mm	

XC998

Product Highlights

●The XC998 wheeled stone forklift loader is a stone handling model built on the basis of XCMG's XC9 series. This model is powerful, sturdy, reliable, safe, and comfortable, with convenient maintenance; it has been specially upgraded to meet the requirements of stone forklifting, stacking, and prying operations, making it the preferred production and handling equipment for various quarries;

●The Cummins electronic fuel injection, turbocharged, air-to-air intercooled engine features electric starting and stopping, and emissions meet Euro V standards; it adopts a "cyclone" three-stage air filter to adapt to the heavy dust conditions in quarries; the advanced power matching technology assures optimal power performance and meets the requirements for full-load climbing;

●The load-sensing full-variable hydraulic system eliminates overflow losses, saving energy and reducing consumption; the flow-amplifying steering system allows for easy and flexible operation, reducing work fatigue; the second steering assist system ensures that the entire machine still has steering function when being towed in case of power loss, enhancing driving safety and reliability;

●The new XCMG ROPS&FOPS micro-pressurized cab features a spacious interior, good sealing, and a wide field of view; core components such as air-bag shock-absorbing seats, dampers, and shock-absorbing gantries assure driving comfort; the intelligent temperature-controlled high-power heating and cooling air conditioner features a "three-dimensional" air outlet layout, providing a comfortable operating environment that allows you to fully enjoy every pleasant driving experience and increase production efficiency.

Main Technical Parameters

Parameters	XC998	
Operating Weight	36500kg	
Rated Load	24700kg	16500kg
Tipping Load (straight)	⩾27500kg	
Lifting Capacity at Max. Reach	1800mm	4310mm
Height to hinge pin, fully raised	4440mm	
Emission Stage	U.S. EPA Tier 4 Final/EU Stage V	
Rated Engine Power	265kW	
Maximum Overall Dimensions (L*W*H)	9800x3350x3870mm	



2 Side Dump Wheel Loader

XC958



Product Highlights

●The XC958 side-dump loader is a side-dump product developed by XCMG on the latest XC9 platform; the overall layout of the machine is comprehensively optimized based on reliability and maintainability; a protective net is installed at the front of the cab to effectively protect the hood and driver's safety, meeting the operational requirements of narrow conditions such as tunnels;

●The high-performance China II engine has a rated power of 162kW, providing strong power with the advantages of low fuel consumption and low emissions. A desert air filter with three-stage filtration can adapt to dusty working conditions. The engine has three working modes: light load, medium load, and heavy load, which can meet the usage requirements of different working conditions and maximize the overall machine's operational efficiency.

●Dual-pump confluence technology assures energy-saving and high efficiency; the fully hydraulic dynamic load-sensing steering is lightweight and flexible; the internationally standardized sealing form effectively solves leakage issues; the working device adopts a Z-shaped reverse six-link structure with a single rocker arm, short tie rod, and horizontally placed boom cylinder; after CAE analysis and optimized design, it has superior operating performance and efficiency;

Main Technical Parameters

Parameters	XC958
Operating Weight	18700kg
Rated Load	5300kg
Tipping Load (straight)	⩾12500kg
Bucket Capacity	2.8m³
Dumping Height (side/forward)	4000/2940mm
Height to hinge pin, fully raised	4150mm
Emission Stage	China II
Rated Engine Power	162kW
Maximum Overall Dimensions (L*W*H)	8770x3000x3455mm

XC968

Product Highlights

●The XC968 side-dump loader is a side-dump product developed by XCMG based on the classic XC968 model from the XC9 platform; the overall layout of the machine is comprehensively optimized for reliability and maintainability, and the field of view of the entire machine has been improved; with an increased wheelbase and centered layout, it enhances stability while ensuring flexibility, meeting the operational requirements of narrow conditions such as tunnels;

●The hydraulic system is powerful, with a maximum lifting capacity of 9.3 tons, providing stronger operating capabilities. With a combined time of three operations ⩽10s, the work efficiency is higher; the dual-pump confluence hydraulic system and flow amplification steering system are equipped as standard, together with a pilot handle, which requires little operating force and offers high operational comfort; the steering angle is 40° , resulting in a smaller turning radius and more flexible turns;

Main Technical Parameters

Parameters	XC968
Operating Weight	21760kg
Rated Load	6500kg
Tipping Load (straight)	14722kg
Bucket Capacity	3.5m³
Dumping Height (side/forward)	4150/3100mm
Height to hinge pin, fully raised	4270mm
Rated Engine Power	192kW
Maximum Overall Dimensions (L*W*H)	9040x3188x3455mm



3 Underground Loader

LW200KV Low-Profile Mining Master / Mine King



Product Highlights

●This model is a 2-ton loader designed and developed by XCMG specifically for underground operations and other low-profile models; it optimizes multiple systems such as power, hydraulics, cooling, and operation for low and enclosed spaces, featuring high reliability, high power, and high comfort; it is widely used in mining and other working conditions;

●The high-performance engine features electronically controlled high-pressure common rail technology, providing low-speed high torque, low noise, and low fuel consumption, with outstanding power advantages; the electronically controlled high-precision EGR valve system is mature and reliable; with three working modes, it can meet the usage requirements of different working conditions and maximize the overall machine's operational efficiency;

Main Technical Parameters

Parameters	LW200KVLow-Profile Mining Master	LW200KVMine King
Operating Weight	6400kg	
Rated Load	2000kg	
Tipping Load (straight)	4400kg	
Bucket Capacity	1m³	
Dumping Height (side/forward)	2580mm	
Height to hinge pin, fully raised	3343mm	
Emission Stage	China II	
Rated Engine Power	66.2kW	
Maximum Overall Dimensions (L*W*H)	6230x1960x2320mm	5950x1960x2550mm

ZL20E(S)

Product Highlights

●This model is a 2-ton loader specially designed and developed by XCMG for low-profile operations such as underground mining. It features optimized systems including power, hydraulics, cooling, and operation specifically tailored for confined spaces, offering high reliability, powerful performance, and superior comfort. Widely used in mining and similar working conditions.

●High-performance engine with electronically controlled high-pressure common rail technology. The engine delivers low-speed, high-torque output with reduced noise and fuel consumption, demonstrating outstanding power advantages. Equipped with an electronically controlled high-precision EGR valve system, it ensures proven reliability and mature performance.

Main Technical Parameters

Parameters	ZL20E (S)
Operating Weight	6100 (dry axle) /6600 (wet axle)
Rated Load	2000kg
Tipping Load (straight)	4400kg
Bucket Capacity	1.0m³
Dumping Height (side/forward)	1710mm
Emission Stage	China Stage II
Rated Engine Power	66.2kW
Maximum Overall Dimensions (L*W*H)	5800X1800X2000mm (The minimum adjustable overall height is 1800 mm)



ZL30E



Product Highlights

●The ZL30E Mine King Loader is a model adapted for low-profile working conditions, launched based on XCMG's classic LW330KV; it offers more reliable quality, more economical use, more comfortable operation, more convenient maintenance, energy-saving efficiency, and significantly improved overall machine performance, with significantly reduced vibration and noise;

●The entire machine is equipped with an air-to-air intercooled, electronically controlled high-pressure common rail high-performance engine, with three exclusive power curves from XCMG built-in, suitable for different working conditions; it features high reliability, high adaptability, low fuel consumption, and low emissions; a low-temperature starting device is optionally available; it adopts a 5-ton planetary power shift transmission and an XCMG high-torque drive axle, meeting the needs of high-intensity and high-load operating environments;

Main Technical Parameters

参数 Parameters	ZL30E
Operating Weight	10400kg
Rated Load	3500kg
Tipping Load (straight)	1.8m³
Bucket Capacity	2910mm
Dumping Height (side/forward)	3839mm
Emission Stage	EU Stage V
Rated Engine Power	99kW
Maximum Overall Dimensions (L*W*H)	7150x2482x2620-2860mm

ZL50E

Product Highlights

●The ZL50E underground loader is a 5-ton product specifically tailored for underground operating conditions; all systems have been optimized based on underground working conditions, featuring good adaptability, sufficient power, safety and reliability, low emissions, mobility, flexibility, high efficiency, and good comfort;

●The body and cab are ultra-low in design, equipped with a mechanical lifting device that allows adjustment of the cab height according to different operating conditions. Using thickened special underground tires with a large contact area results in low ground pressure and improved cut resistance.

●Equipped with a high-performance engine specifically for construction machinery featuring high-pressure common rail and air-to-air intercooling, the engine has a rated power of 162kW; while assuring normal operation, it has ample excess power to easily handle various working conditions; the single-row radiator effectively reduces the engine water temperature, hydraulic system oil temperature, and transmission system oil temperature, with high cooling efficiency and ease of cleaning; the new reinforced drive axle from XCMG offers high reliability;

Main Technical Parameters

Parameters	ZL50E
Operating Weight	18500kg
Rated Load	5000kg
Tipping Load (straight)	⩾11500kg
Bucket Capacity	2.5m³
Dumping Height (side/forward)	3380mm
Height to hinge pin, fully raised	4100mm
Emission Stage	China III
Rated Engine Power	162kW
Maximum Overall Dimensions (L*W*H)	8470x3000x2860-3130mm



4 Wheel dozer

DL210KN Wheel dozer



Product Highlights

●The DL210KN is designed and developed based on the structural platform of XCMG's high-quality LW500K series, which has excellent market performance. It features energy-saving efficiency and high reliability;

●Equipped with an energy-saving, high-performance engine featuring air-to-air intercooling and electronically controlled high-pressure common rail technology, with a rated power of 162kW, and a desert air filter with three-stage filtration, it can adapt to dusty working conditions; it boasts high reliability and high adaptability, as well as the advantages of low fuel consumption and low emissions.

●The single-layer large-pitch wind tunnel structure radiator optimizes the cooling system for the operating environment and characteristics of tracked bulldozers that mainly use traction force; it effectively solves the problem of excessively high oil temperature in the transmission and torque converter during bulldozing operations of tracked bulldozers. Each core is arranged in a single layer side by side, providing excellent anti-clogging performance for the radiator and convenience for users in outdoor operating environments;

Main Technical Parameters

Parameters	DL210KN
Operating Weight	16500kg
Blade Capacity	4.0m^3
Lifting Height	1000mm
Emission Stage	China II
Rated Engine Power	162kW
Maximum Overall Dimensions (L*W*H)	7430x2775x3515mm

DL350 Wheel dozer

Product Highlights

●The DL350 Wheel Dozer is a new generation of internationally advanced products independently developed by XCMG utilizing its international heavy-tonnage research and development platform; it is the preferred auxiliary production equipment for ports, mines, and large-scale quarries;

●With a long wheelbase and heavy-duty design, it adapts to various harsh operating environments and is more suitable for heavy-duty mining operations. High-performance Phase III engine, green and energy-saving with powerful performance. Equipped with internationally leading transmission and drive axle of high quality, it features strong impact resistance, efficient and reliable transmission;

●Load-sensing variable technology provides pressure and flow according to operational needs, significantly improving fuel efficiency. The working hydraulic system adopts electro-hydraulic proportional control for accurate and smooth operation; the three-cylinder, three-degree-of-freedom working device meets the needs of different working conditions while being easy to operate, improving the overall adaptability of the machine;

Main Technical Parameters

Parameters	DL350
Operating Weight	30000kg
Blade Capacity	6.88m^3
Lifting Height	996mm
Emission Stage	China III
Rated Engine Power	277kW
Maximum Overall Dimensions (L*W*H)	8300x4345x3770mm



DL560 Wheel Dozer



Product Highlights

●The XCMG DL560 Wheel Dozer is a product from XCMG Earthmoving, tailored for the requirements of land leveling, clearing, and related bulldozing operations in large open-pit mines; it has undergone adaptive improvements and upgrades based on bulldozing operations and cold weather conditions; as the largest wheel dozer produced in China, it features a U-shaped blade with a rated capacity of 10.0m3, and is characterized by high operational efficiency, safety and reliability, comfortable operation, and flexible working capabilities;

●Cummins QSK19 Phase III high-power, high-torque, low-speed engine; this high-performance engine has a high torque reserve coefficient, and the entire machine has strong traction and rapid hydraulic response; the hydraulically driven independent cooling fan intelligently adjusts its speed, reducing noise, improving fuel economy, and extending service life;

Main Technical Parameters

Parameters	DL560
Operating Weight	49000kg
Blade Capacity	10.0m^3
Lifting Height	1852mm
Emission Stage	China III
Rated Engine Power	418kW
Maximum Overall Dimensions (L*W*H)	10750x4912x4434mm

5 Clamp Wheel Loader

XC958 Clamp Wheel Loader

Product Highlights

●Based on XCMG's classic 5-ton XC958 model from the XC9 series, it has undergone adaptive modifications and optimizations to the front-end equipment specifically for common clamping operations, improving operational efficiency; it applies to loading, unloading, and transporting materials such as plates, wooden blocks, wooden sticks, and branches, and is widely used in ports, docks, wood processing plants, cargo yards, forests, and other scenarios;

●With an ultra-long centered wheelbase and a large steering angle design, the steering stability is improved by 30%, the steering capacity is increased by 10%, and the industry's largest hinge opening provides a 10% increase in torsional resistance and a 12% increase in maintenance space.

●The dual-pump combined hydraulic system reduces operating force by 10%, with a combined operation time of ≤9.5 seconds; and the boom and bucket digging force is increased by 10%. Fully hydraulic dynamic load sensing steering is lightweight and flexible;

Main Technical Parameters

Parameters			
Operating Weight	17680kg		
Rated Load	5000kg		
Grab Diameter	Clamp offset-1090mm	Clamp misalignment-100mm	Frog-mouth clamp-980mm
Rated Engine Power	162kW		
Maximum Overall Dimensions (L*W*H)	8320x2850x3515mm		



XC968 Clamp Wheel Loader



Product Highlights

●Based on XCMG's classic 5-ton XC958 model from the XC9 series, it has undergone adaptive modifications and optimizations to the front-end equipment specifically for common clamping operations, improving operational efficiency; it applies to loading, unloading, and transporting materials such as plates, wooden blocks, wooden sticks, and branches, and is widely used in ports, docks, wood processing plants, cargo yards, forests, and other scenarios;

●The large-displacement engine provides powerful performance; the transmission developed independently by XCMG is equipped with an automatic gearshift switch (KD function), featuring four forward gears and four reverse gears; with advanced performance, it offers smooth gearshifts and simplifies the driver's operation;

●The hydraulic system is powerful, providing enhanced operating capacity with a combined time for three operations of ≤10s for higher work efficiency; it features a dual-pump combined flow hydraulic system and a flow-amplified steering system, and comes standard with a pilot control lever for reduced operating force and improved operational comfort; with a steering angle of 40° , it has a smaller turning radius and more flexible turning;

Main Technical Parameters

Parameters	XC968	
Operating Weight	21000kg	
Rated Load	6000kg	
Grab Diameter	Clamp offset-900mm	Clamp misalignment-360mm
Rated Engine Power	178kW	
Maximum Overall Dimensions (L*W*H)	8805x2860x3455mm	

6 Grass Grab Loader

XC938 Grass Grab Loader

Product Highlights

●Based on XCMG's classic 3-ton XC938 model from the XC9 series, it has undergone adaptive modifications specifically for common grass-grabbing operations, optimizing the front-end equipment to improve operational efficiency; it applies to loading, unloading, and transporting materials such as plates, wooden blocks, wooden sticks, branches, straw, weeds, and other materials, and is widely used in docks, wood processing plants, forests, paperboard factories, biomass power plants, and other scenarios;

●The high-pressure, low-flow hydraulic system minimizes pressure loss in the piping, promoting energy efficiency and reducing consumption; the hydraulic system's combined operations are completed in a short period, enhancing work efficiency; with a large steering angle, the machine offers high flexibility, increased steering pressure, and strong adaptability to uneven terrain;

Main Technical Parameters

Parameters	XC938
Operating Weight	10400kg
Max. Clamp Opening Size	2800mm
Dumping Height	2930mm
Emission Stage	China III
Rated Engine Power	97.5kW
Maximum Overall Dimensions (L*W*H)	7330x2482x3220mm



XC958 Grass Grab Loader



Product Highlights

●Built upon the classic 3-ton XC958 model from XCMG's XC9 series, it has undergone adaptive modifications tailored for common grass-grabbing operating conditions; the front-end equipment has been optimized to enhance operational efficiency, making it suitable for loading and transporting materials such as plates, wooden blocks, wooden sticks, branches, straw, weeds, and other similar items; it is widely used in docks, wood processing plants, forests, paperboard factories, biomass power plants, and other scenarios;

●With an ultra-long centered wheelbase and a large steering angle design, the steering stability is improved by 30%, the steering capacity is increased by 10%, and the industry's largest hinge opening provides a 10% increase in torsional resistance and a 12% increase in maintenance space.

Main Technical Parameters

Parameters	XC958
Operating Weight	17230kg
Max. Clamp Opening Size	2900mm
Dumping Height	3070mm
Emission Stage	China II
Rated Engine Power	162kW
Maximum Overall Dimensions (L*W*H)	8445x2996x3455mm

7 Skidder

XC360 Skidder

Product Highlights

●The high-performance engine is equipped with turbocharging, electric start, and electric shutdown functions. It boasts powerful performance, large power reserve, and convenient and reliable operation. Adopting a full-range elastic suspension significantly reduces the vibration of the entire machine and fatigue damage caused by resonance, alleviates the driver's fatigue intensity, and improves the driver's operating comfort; it has the advantages of high reliability, high adaptability, low fuel consumption, and low emissions;

●The working hydraulic system and steering hydraulic system utilize single-pump shunting technology, which reduces heat generation in the hydraulic system and saves energy and reduces consumption; the working hydraulic system adopts pilot control technology to achieve the functions of winch winding and unwinding, as well as shovel lifting and lowering. The pilot control lever requires little operating force, greatly reducing the driver's labor intensity; the steering hydraulic system employs flow amplification technology, making steering maneuverable and flexible, thereby enhancing the driver's operational comfort and the overall reliability of the machine;

Main Technical Parameters

Parameters	XC360
Maximum Rope Traction Force	204KN
Rated Engine Power	178kW
Maximum Overall Dimensions (L*W*H)	7840x3220x3550mm



8 Tire Grabber

LW1200KN Tire Grabber



Product Highlights

●The LW1200KN tire changing loader is designed based on the LW1200KN loader, with optimizations made to key components and systems such as the working device, hydraulic system, and overall bridge load, assuring the machine's adaptability to working conditions, reliability, and ease of operation; it is the preferred equipment for ports, logistics, and large-scale mining operations;

●Equipped with a high-power Cummins electronically controlled engine with a rated power of 567kW, it applies to environments at altitudes above 5000 meters, effectively avoiding power reduction in high-altitude conditions; featuring direct injection and turbocharging, it has a high torque reserve coefficient, is energy-saving and environmentally friendly, and provides powerful performance;

Main Technical Parameters

Parameters	LW1200KN
Operating Weight	53700kg
Rated Load	8000kg
Clamp Opening Range	1400-4200mm
Attachment Rotation Angle	±50°
Emission Stage	China III
Rated Engine Power	418kW









Supporting Attachments

Wheel Loader Attachment


Wood clamping jaw I (with opposing teeth)


Wood clamping jaw II (with staggered teeth)


Frog-mouth clamp


Pipe clamp


Hay Grapple


Snow plow


Sliding fork

Skid Steer Loader Attachment


4-in-1 Bucket


Combined shovel and sweeper machine


Pallet Fork


Concrete mixing bucket


Weed cleaner


Group/cluster sweeper


Forward-moving enclosed sweeper


Bulldozer blade


Snow Pusher


Bevel Sweeper


Grapple Bucket


Clamp


Snow thrower


Trencher


Dual arm digger


Standard Bucket


Lawn mower


Auger bit

Backhoe Loader Attachment


Quick-change four-in-one bucket


6-in-1 bucket


Bulldozer


4-in-1 Bucket


Flat blade bucket


Pallet Fork


Bulldozer


Forward-moving sweeper



Breaking hammer


Auger bit


Mechanical quick coupler


Quick-change system for loading end

Compact Loader Attachment


Width-limited bucket


Quick-change four-in-one bucket


Quick-change Pallet Fork

Flat plate clamp

Quick-change Bucket

Standard Bucket

Hay Grapple

Log Grapple

Snow Pusher

Sweeper

Bevel Sweeper

Hay Grapple

●XCMG Loader Machinery continuously improves and upgrades its product technologies. In case of discrepancies between configuration parameters, details, or appearance in product brochure and the actual products, the actual product shall prevail.
●XCMG offers diversified customization services. Optional configurations tailored to different requirements may result in variations in machine specifications or appearance compared to this brochure. Please refer to the actual product for final details. For more information on optional configurations and supply cycles, contact your local XCMG dealer.
●XCMG reserves all rights of interpretation and retains the right to modify products without prior notice to users.